

# Waste Isolation Pilot Plant Environmental Monitoring Plan

**United States Department of Energy  
Waste Isolation Pilot Plant**

DOE/WIPP-99-2194  
Revision 12



Effective Date: September 1, 2021

This document supersedes DOE/WIPP-99-2194, Rev. 11

|

This document has been submitted as required to:

U.S. Department of Energy  
Office of Scientific and Technical Information  
PO Box 62  
Oak Ridge, TN 37831  
(865) 576-8401

Additional information about this document may be obtained by  
calling 1-800-336-9477.

Unlimited, publicly available full-text scientific and technical reports  
produced since 1991 are available online at Information Bridge  
([www.osti.gov/bridge](http://www.osti.gov/bridge)).

U.S. Department of Energy and its contractors may obtain full-text  
reports produced prior to 1991 in paper form, for a processing fee,  
from:

U.S. Department of Energy  
Office of Scientific and Technical Information  
P.O. Box 62  
Oak Ridge, TN 37831-0062  
Phone: (865) 576-8401  
Fax: (865) 576-5728  
Email: [reports@osti.gov](mailto:reports@osti.gov)

Available for sale to the public from:

U.S. Department of Commerce  
National Technical Information Service  
5301 Shawnee Rd  
Alexandria, VA 22312  
Phone: (800) 553-6847 or (703) 605-6000  
Fax: (703) 605-6900  
Email: [info@ntis.gov](mailto:info@ntis.gov)

# Waste Isolation Pilot Plant Environmental Monitoring Plan

**United States Department of Energy  
Waste Isolation Pilot Plant**

DOE/WIPP-99-2194  
Revision 12



Effective Date: September 1, 2021

Approved by: /Signature on File/  
Michael R. Brown  
Director, Environmental Regulatory  
Compliance Division

08-25-2021  
Date

## TABLE OF CONTENTS

CHANGE HISTORY SUMMARY .....	6
ACRONYMS AND ABBREVIATIONS .....	7
1.0 INTRODUCTION .....	9
2.0 PROJECT DESCRIPTION .....	12
3.0 SITE CHARACTERISTICS .....	13
3.1 Geography .....	13
3.2 Geology .....	15
3.3 Climate .....	16
3.4 Hydrology .....	16
3.5 Ecology .....	17
4.0 DOSE CALCULATIONS .....	18
5.0 ENVIRONMENTAL MONITORING PROGRAM .....	19
5.1 Guidelines .....	19
5.2 Radiological Environmental Monitoring .....	22
5.2.1 Airborne Effluent Monitoring .....	22
5.2.2 Airborne Environmental Surveillance .....	23
5.2.3 Aqueous Phase Effluent Monitoring .....	29
5.2.4 Biotic Sampling .....	30
5.2.5 Soil Sampling .....	32
5.2.6 Surface Water Sampling .....	32
5.2.7 Sediment Sampling .....	33
5.2.8 Groundwater Sampling .....	34
5.3 Nonradiological Environmental Monitoring .....	37
5.3.1 Meteorological Monitoring .....	37
5.3.2 VOC Monitoring .....	38
5.3.3 Groundwater Surveillance .....	39
5.3.4 WIPP Perched Anthropogenic Water Monitoring .....	39
5.3.5 Surface Water Monitoring .....	41
5.4 Land Management .....	42
5.5 Oil and Gas Surveillance .....	42
6.0 DATA ANALYSIS .....	42
6.1 Accuracy .....	43
6.2 Temporal and Spatial Analysis .....	44
6.3 Distributions and Descriptive Statistics .....	45
6.4 Data Anomalies .....	45
6.5 Data Comparisons .....	45
6.6 Laboratory Procedures .....	46
6.7 Sample Handling .....	46
6.7.1 Sample Identification and Tracking .....	46
6.7.2 Sampling Schedule .....	46

Waste Isolation Pilot Plant Environmental Monitoring Plan  
DOE/WIPP-99-2194, Rev. 12

---

6.7.3	Environmental Activity Levels .....	47
6.7.4	Packaging and Shipping of Samples .....	47
7.0	QUALITY ASSURANCE .....	47
7.1	Goal .....	48
7.2	Program Elements .....	49
7.2.1	Program .....	49
7.2.2	Personnel Training and Qualification .....	49
7.2.3	Quality Improvement.....	50
7.2.4	Documents and Records .....	50
7.2.5	Work Processes.....	51
7.2.6	Design .....	53
7.2.7	Procurement .....	53
7.2.8	Inspection and Acceptance Testing .....	53
7.2.9	Management Assessment .....	53
7.2.10	Independent Assessment .....	54
	REFERENCES.....	55

**TABLE OF FIGURES**

Figure 3-1 - Location of the WIPP Site .....	13
Figure 3-2 - Plat of the WIPP Site .....	14
Figure 3-3 - Generalized Stratigraphy of the WIPP Site .....	15
Figure 5-1 – Location of Effluent Monitoring Locations .....	23
Figure 5-2 - Air Sampling Sites .....	25
Figure 5-3 - Vegetation/Soil Sampling Sites.....	31
Figure 5-4 - Sediment Sampling Sites.....	33
Figure 5-5 - Groundwater Level Surveillance Wells .....	35
Figure 5-6 - Groundwater Sampling Locations.....	36
Figure 5-7 – Location of Perched Anthropogenic Water (PAW) Wells .....	40

**LIST OF TABLES**

Table 5-1 - Environmental Monitoring Sampling .....	27
Table 5-2 - EMP Analytical Array .....	28

### CHANGE HISTORY SUMMARY

REVISION NUMBER	DATE ISSUED	DESCRIPTION OF CHANGES
10	06/22/17	<ul style="list-style-type: none"><li>• Updated references to source documents.</li><li>• Provided more detailed links to implementing documents to correlate to the DOE/HDBK-1216-2015, Environmental Radiological Effluent Monitoring and Environmental Surveillance, handbook.</li><li>• Updated groundwater and volatile organic compound sampling program descriptions.</li></ul>
11	08/01/19	<ul style="list-style-type: none"><li>• Various editorial changes and corrections.</li><li>• Numerous changes in References.</li><li>• Format changes to update Writer's Guide.</li><li>• Updated Exclusive Use Area boundary information.</li></ul>
12	09/01/21	<ul style="list-style-type: none"><li>• Updated Acronym and Reference Lists.</li><li>• Updated Tables and Figures.</li><li>• Clarifications made throughout document.</li></ul>

## ACRONYMS AND ABBREVIATIONS

AL	Air LO-VOL
ALARA	as low as reasonably achievable
ANSI	American National Standards Institute
ASER	Annual Site Environmental Report (WIPP)
ASME	American Society of Mechanical Engineers
BECR	Biennial Environmental Compliance Report
CBFO	Carlsbad Field Office
CFR	Code of Federal Regulations
CH	contact-handled
CofC	Chain of Custody
CY	calendar year
DMP	Detection Monitoring Program
DOE	U.S. Department of Energy
EE	event evaluation
EM&H	Environmental Monitoring & Hydrology
EMP	Environmental Monitoring Plan
EPA	U.S. Environmental Protection Agency
EUA	Exclusive Use Area
FAS	fixed air sampler
FEIS	Final Environmental Impact Statement
GC/MS	Gas Chromatography/Mass Spectrometry
GMP	Groundwater Monitoring Program
HEPA	high-efficiency particulate air
HWDU	hazardous waste disposal unit
IVS	Interim Ventilation System
LO-VOL	low-volume
LUR	land use request
MET	meteorological tower
MOU	Memorandum of Understanding
mrem/yr	millirem-per-year
MTRU	mixed transuranic waste
NEPA	National Environmental Policy Act of 1969
NESHAP	National Emission Standards for Hazardous Air Pollutants
NWP	Nuclear Waste Partnership LLC
PASK	passive air sampling kit
PAW	perched anthropogenic water
Permit	Hazardous Waste Facility Permit
PIC	Potential Impact Category
PPA	Property Protection Area
PZ	piezometer
QA	quality assurance
QAPD	Quality Assurance Program Description
QC	quality control
RCRA	Resource Conservation and Recovery Act
RH	remote-handled
RIDS	records inventory and disposition schedule

scfm	Standard Cubic Feet Per Minute
SHS	Salt Handling Shaft
SVS	Supplemental Ventilation System
SSCVS	Safety Significant Confinement Ventilation System
TDS	total dissolved solids
TKN	total Kjeldahl nitrogen
TRU	transuranic
VOC	volatile organic compound
WHS	Waste Handling Shaft
WIPP	Waste Isolation Pilot Plant
WLMP	Water Level Monitoring Program



## 1.0 INTRODUCTION

The environmental monitoring program at the Waste Isolation Project Plant (WIPP) is conducted to detect and quantify releases for United States Department of Energy (DOE) activities; characterize at and in DOE properties; and support assessment of potential public exposure through available pathways (e.g., air, water, soil, and biota). This Plan documents the elements needed to establish and maintain effective environmental monitoring activities, including:

- Verifying and supporting compliance with applicable federal, state, and local environmental laws, regulations, permits, and orders, including elements of DOE Order 458.1, Radiation Protection of the Public and the Environment (formerly DOE Order 5400.5).
- Establishing background data and characterizing trends in the physical, chemical, and biological condition of effluent and environmental media using data assessments and statistical analysis.
- Identifying potential environmental contamination and evaluating the need for remedial actions or measures to mitigate the problem using a graded approach<sup>1</sup>.
- Detecting, characterizing, and reporting unplanned releases per DOE Order 232.2A, Occurrence Reporting and Processing of Operations Information.
- Evaluating the effectiveness of effluent treatment and control and pollution abatement programs and assessing the radiological dose to the public and biota.
- Determining compliance with commitments made in environmental impact statements, environmental assessments, documented safety analyses, or other U.S. Department of Energy (DOE) documents.

<sup>1</sup> A graded approach is a process by which the level of analysis, documentation, and the actions demonstrate regulatory compliance with applicable regulatory limits in environmental media.

This Environmental Monitoring Plan (EMP) describes: the rationale and design criteria for the Environmental Monitoring Program, the extent and frequency of monitoring and measurements, procedures for laboratory analyses, quality assurance (QA) requirements, program implementation procedures, and direction for the preparation and disposition of reports (e.g., the WIPP Annual Site Environmental Report (ASER), required by DOE Order 231.1B, Environment, Safety and Health Reporting) This EMP describes radiological environmental monitoring, nonradiological environmental monitoring, and land management and surveillance programs during the facility's operational phase. It also discusses the WIPP QA/quality control (QC) program as it relates to environmental monitoring. Revisions to the environmental monitoring program may be necessary to allow the use of advanced technology and new data collection techniques. This EMP is reviewed annually and revised biennially, to document any changes made to the environmental monitoring program. Annual review of the EMP is based on precedent established in the now cancelled DOE Order 5400.1, General Environmental Protection Program. This is not a requirement in DOE Order 436.1, Departmental Sustainability.

This EMP is part of an overall program designed to ensure that appropriate capabilities are maintained for monitoring and assessing routine and unplanned releases of radioactive materials, and assessing dose to the public, in accordance with the requirements of DOE Order 458.1. The specific requirement of DOE Order 458.1 to implement a documented environmental radiological protection program is satisfied by implementation of this EMP, including sub-tier manuals and procedures. Additionally, the Waste Isolation Pilot Plant Radiation Safety Manual (WP 12-5), including implementing sub-tier radiological control program documents relating to radiation protection of the public and the environment, reporting of radiological release occurrences, and environmental radiological surveillance satisfies this objective. Environmental surveillance and effluent monitoring data and assessments are reported to the public annually in the WIPP ASER.

This document is prepared for WIPP using concepts contained in guidance documents DOE-HDBK-1216-2015, DOE Handbook: Environmental Radiological Effluent Monitoring and Environmental Surveillance, which replaced DOE/EH-0173T in 2015, and reference DOE Order 5400.1 superseded, DOE Order 458.1, and is a key document in meeting the requirements of DOE Order 436.1, to implement conformance to ISO 14001, Environmental Management Systems.

This EMP provides a description of other environmental conditions at WIPP, including:

- A description of WIPP and its mission
- A description of the local environment
- An overview of the methodology used to assess radiological consequences to the public

Environmental monitoring activities at WIPP generally fall into four categories: (1) collection of samples from various media – air, water, soil, flora, fauna, etc., and analyzing them for specific variables; (2) evaluating whether WIPP activities cause adverse environmental impacts; (3) preparing and publishing documents showing compliance or noncompliance with federal, state, and local regulations; and (4) taking corrective action when an adverse impact on the environment is identified due to any radiological or nonradiological source.

A number of provisions designed to mitigate potential environmental impacts appear, as applicable, in the WIPP Land Management Plan (DOE/WIPP-93-004) and in statements of work issued to contractors involved in the operation of the WIPP facility. These provisions are listed below:

- Protection of environmental resources, including avoidance of unnecessary damage to vegetation, wildlife, and soil by controlling traffic, preventing erosion, minimizing disturbance zones, and cleaning up spills.
- Protection of air resources, including mitigation of airborne radioactive contaminants by filtration and containment, the control of hydrocarbon emissions by using approved fuels, the suppression of dust by spraying with water, and the monitoring and control of noise.
- Protection of water resources, including the use of lined retention ponds such as the sewage treatment system for controlling suspended materials, solutes, and other pollutants; lined storm water ponds; lined salt storage ponds; lined salt cells; and shipment of radioactive brines from the underground to approved low-level waste facilities.
- Preservation and recovery of historical, archaeological, and cultural resources, including the delay of construction activities as necessary to investigate and mitigate impacts to historical or archaeological resources managed by the WIPP Land Use Coordinator through the Land Use Request process.
- Post-construction reclamation, including the removal of temporary construction facilities, access roads, stockpiles, and work areas, as well as the restoration of all damaged landscape features outside the limits of approved work areas.

WIPP must also comply with specified permitting and approval requirements of several federal and state regulatory agencies.

## 2.0 PROJECT DESCRIPTION

The primary purpose of WIPP is to dispose of defense-generated transuranic (TRU) waste, some of which is TRU mixed waste. TRU waste is waste containing more than 100 nanocuries of alpha-emitting transuranic isotopes per gram of waste, with half-lives greater than 20 years, except for (A) high-level radioactive waste; (B) waste that the DOE Secretary has determined, with the concurrence of the U.S. Environmental Protection Agency (EPA) Administrator, does not need the degree of isolation required by the disposal regulations; or (C) waste that the Nuclear Regulatory Commission has approved for disposal on a case-by-case basis in accordance with Title 10 Code of Federal Regulations (CFR) Part 61, Licensing Requirements for Land Disposal of Radioactive Waste. TRU Mixed Waste is TRU waste that is also a hazardous waste as defined by the New Mexico Hazardous Waste Act and 20.4.1.200 New Mexico Administrative Code (incorporating 40 CFR §261.3). The Waste Isolation Pilot Plant Land Withdrawal Act established the location, agency responsibilities, and parameters within which such disposal could proceed (P.L. 102-579, 1992).

Contact-handled (CH) and remote-handled (RH) TRU wastes are received and disposed of at the WIPP facility. CH waste consists of TRU waste that has a surface dose rate not greater than 200 millirem per hour, and therefore can be handled without additional shielding to protect personnel. RH waste is TRU waste that, due to higher levels of penetrating radiation, must be shielded and/or handled remotely. Waste is classified as RH when the surface dose rate is 200 millirem per hour or greater, but not exceeding 1,000 rems per hour.

CH and RH wastes are emplaced in rooms and adjacent access drifts that have been excavated from the Salado Formation, a thick sequence of salt beds. The disposal horizon is located at a depth of 655 meters (2,150 feet). When a disposal room will no longer receive waste for emplacement, ventilation barriers are erected. After completion of waste emplacement in a panel, the panel is removed from active ventilation.

When WIPP is decommissioned, specially designed shaft seals and closure systems will be placed in the excavated shafts and in the drifts. Geologic pressures and the plasticity of the salt will result in the excavation's gradual closure due to creep. This closure will encapsulate and isolate waste within the Salado Formation providing permanent disposal.

### 3.0 SITE CHARACTERISTICS

#### 3.1 Geography

WIPP is located in Eddy County in southeastern New Mexico (Figure 3-1) within the Pecos Valley section of the southern Great Plains physiographic province (Powers et al., 1978). The site is 26 miles (42 km) east of Carlsbad in an area known as Los Medaños (the dunes). Los Medaños is a relatively flat, sparsely inhabited plateau with little surface water. WIPP Site (Figure 3-2) consists of 16 sections of federal land in Township 22 South, Range 31 East, New Mexico Principal Meridian.

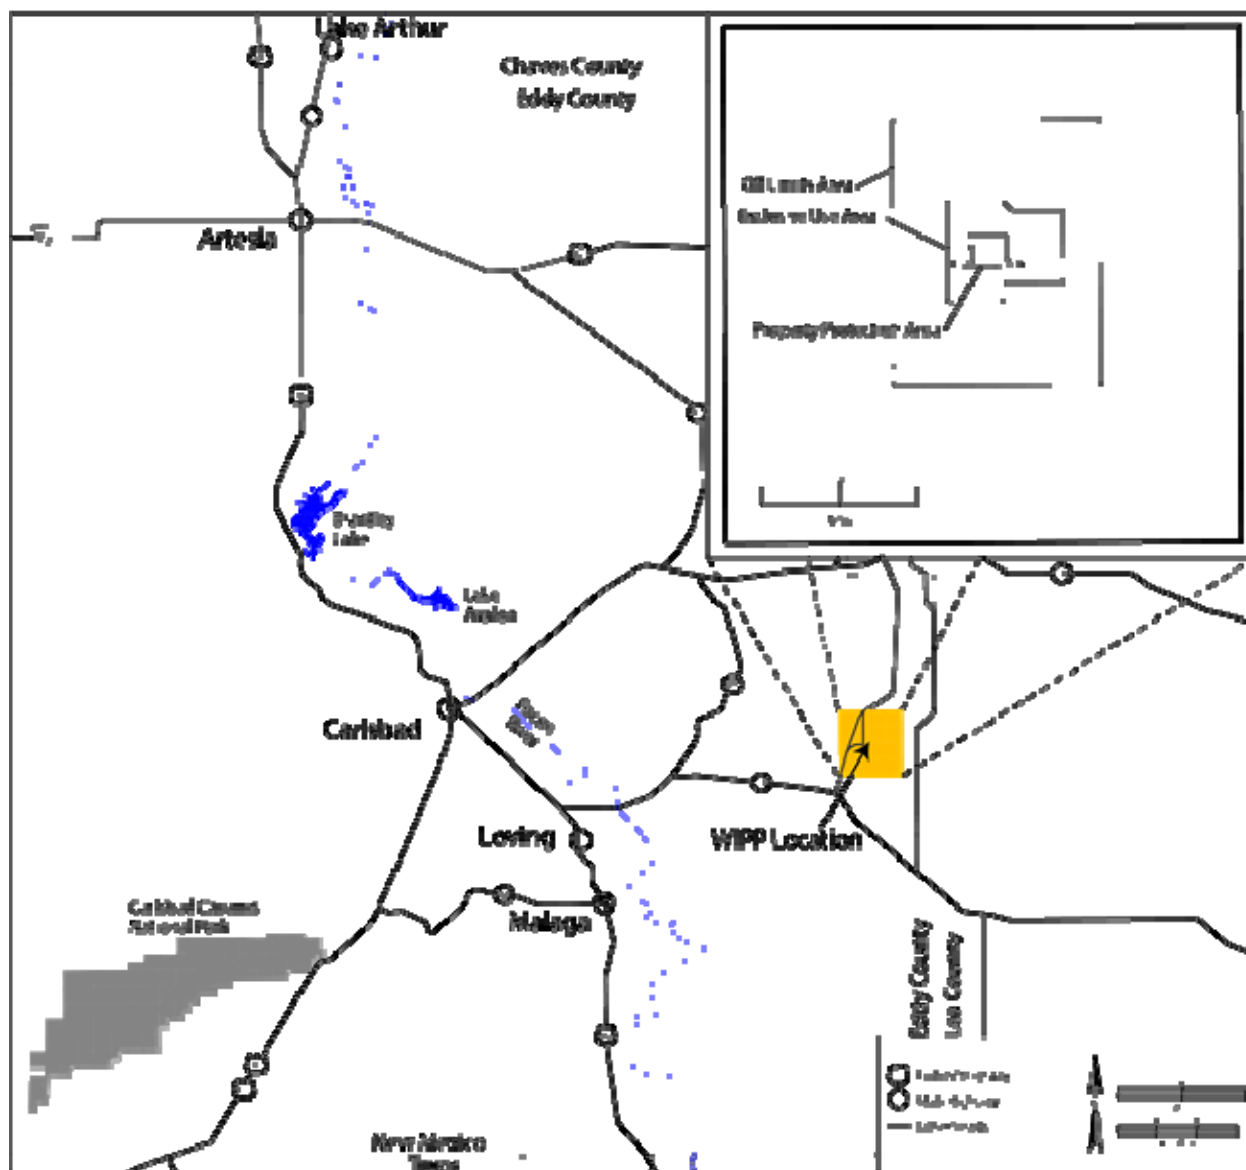


Figure 3-1- Location of the WIPP Site

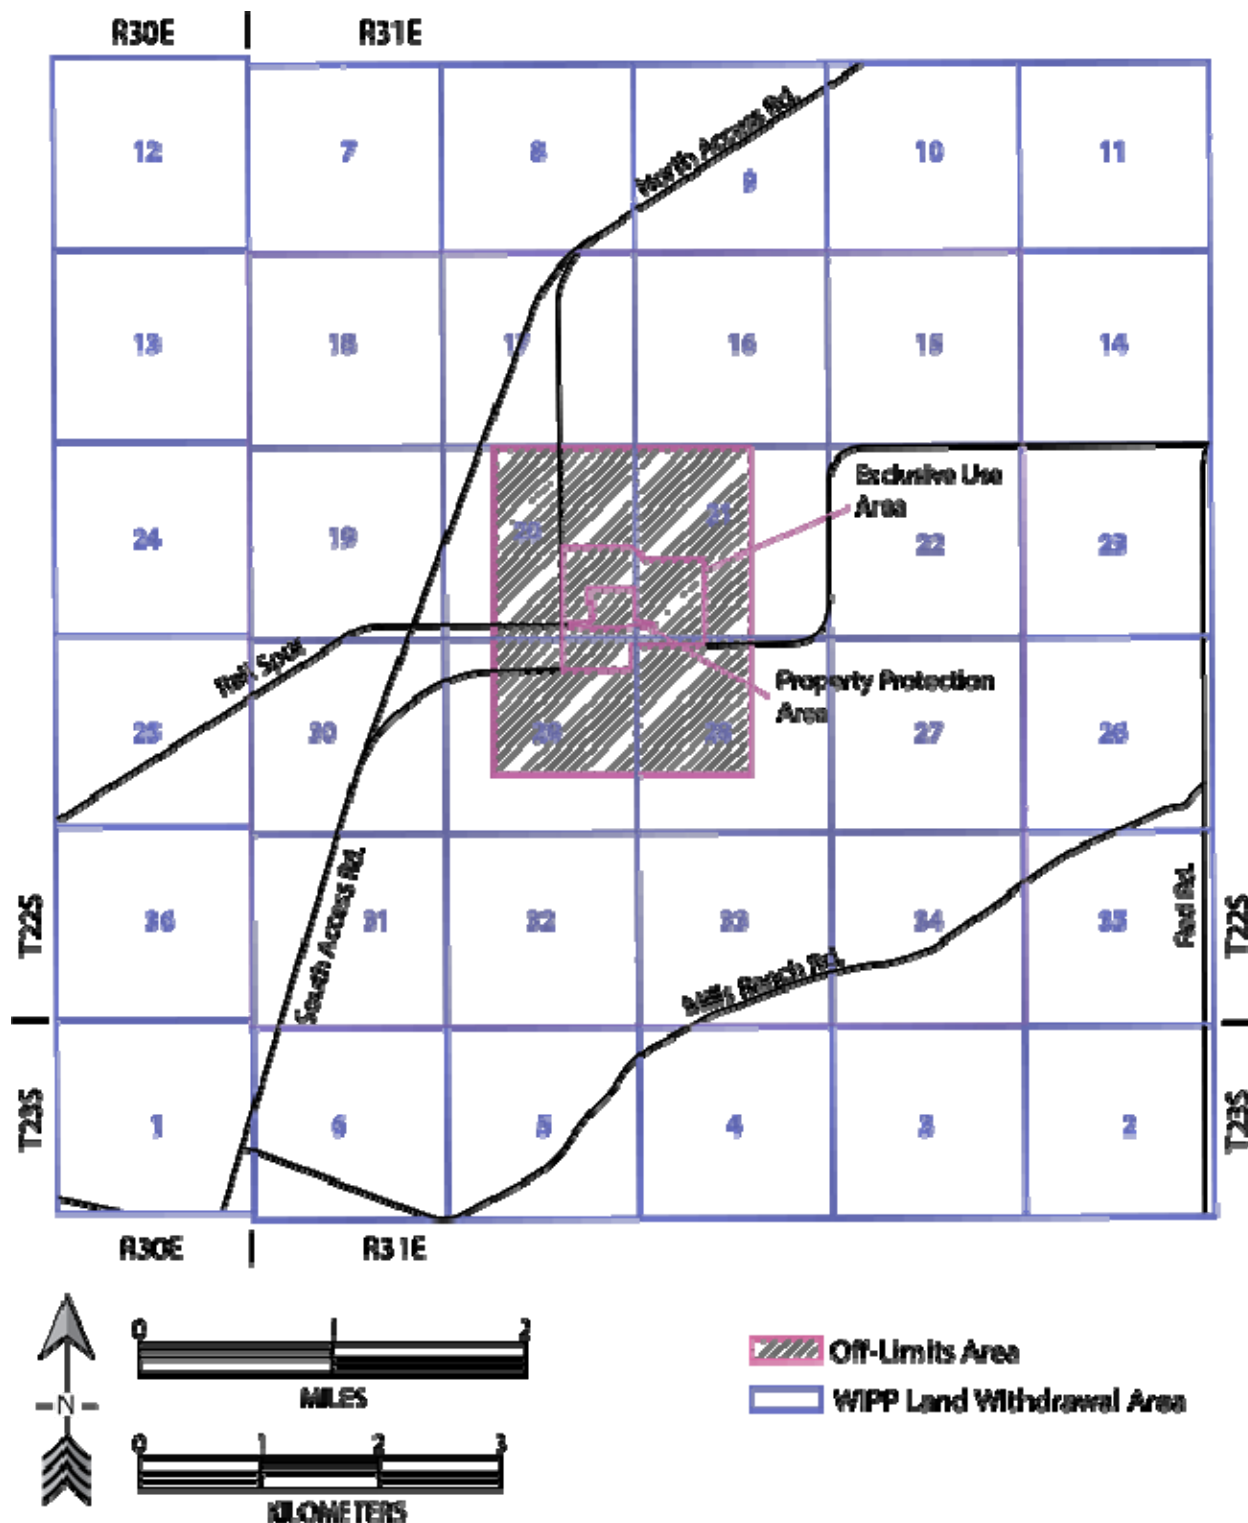


Figure 3-2 - Plat of the WIPP Site

### 3.2 Geology

The soils of Los Medaños are sandy and well drained, with a well-developed caliche layer occurring below 3.3 ft. (1 m). There are no integrated natural surface drainage features at the Site. Scattered throughout the local area are numerous livestock watering ponds (tanks) and shallow playas that retain water sporadically. The nearest of these playas is located approximately seven miles southwest of the Site.

Geologically, the Site is part of the northern portion of the Delaware Basin, one of the western-most sedimentary basins known collectively as the Permian Basin. Figure 3-3 illustrates the local generalized stratigraphy.

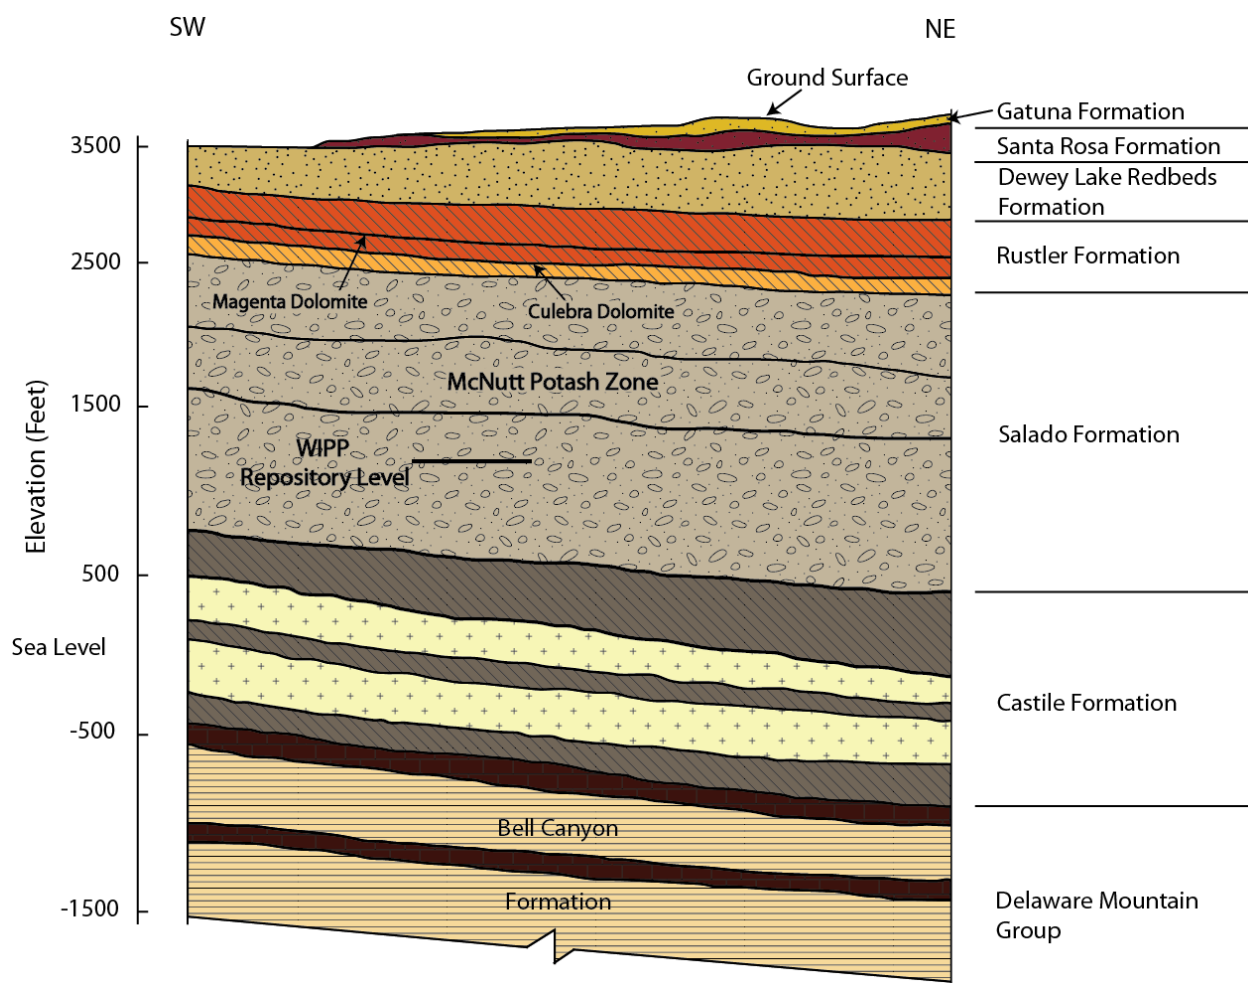


Figure 3-3 - Generalized Stratigraphy of the WIPP Site

### 3.3 Climate

The climate of the region is semiarid, with variable temperatures, low precipitation and humidity, and a high evaporation rate. Winds are mostly from the southeast and moderate. In late winter and spring, there are strong west winds and dust storms (Environmental Impact Statement, DOE/EIS-0026).

Precipitation at WIPP is relatively low, averaging 11 to 13 in (28 to 33 cm) annually, and is unevenly distributed throughout the year. Winter is the season of least precipitation, averaging less than 0.6 in (1.5 cm) of rainfall per month. Snow averages about 5 in (13 cm) per year at the Site and seldom remains on the ground for more than a day at a time because of the typically above-freezing temperatures in the afternoon. Approximately half the annual precipitation comes from frequent thunderstorms in June through September (DOE/EIS-0026).

Temperatures are moderate throughout the year, although seasonal changes are distinct. Mean annual temperatures in southeastern New Mexico are near 60 °F (15.6 °C). In the winter (December through February), nighttime lows average near 23 °F (-5 °C), and daytime highs average about 55 °F (12.7 °C). The lowest recorded temperature at the nearest Class A weather station in Roswell was -29 °F (-33.8 °C) in February 1905. In the summer (June through August), the daytime temperature exceeds 90 °F (32.2 °C) approximately 75 percent of the time (DOE/EIS-0026).

On June 27, 1994, the National Weather Service documented a temperature of 122 °F (50 °C) at the WIPP Site as the record high temperature for New Mexico. Based on DOE/WIPP-20-3591, the average monthly temperatures measured at WIPP in 2019 ranged from 85.89 °F (29.94 °C) during August, to 42.19 °F (5.66 °C) in January. The lowest recorded temperature was 18.59 °F (-7.45 °C) in March and the highest temperature was 106.27 °F (41.26 °C) in August (DOE/WIPP-20-3591).

### 3.4 Hydrology

The nearest large surface water body (Salt Lake) is located approximately 7 mi (13 km) west-southwest of the WIPP Site in Nash Draw. The Pecos River is located 14 mi (22.4 km) southwest of the WIPP Site.

Several water-bearing zones have been studied near WIPP. The most significant are the Culebra Dolomite and Magenta Dolomite Members of the Rustler Formation, which consist primarily of fractured dolomite. These dolomite units produce brackish to saline water. Another saline zone identified is at the Rustler-Salado contact, which contains very little water at the WIPP Site. It was exposed during shaft construction and produced only a small amount of brine seepage. Other water-bearing zones that have been evaluated as part of Site characterization include the middle Dewey Lake Formation and the overlying Triassic Dockum Group above the repository, and the Bell Canyon and Castile Formations below the repository.



The Dewey Lake Redbeds Formation [Dewey Lake] (Figure 3-3), which contains limited amounts of fresh water, is composed of alternating thin, even beds of siltstone and mudstone with lenticular interbeds of fine-grained sandstone. Exploratory drilling during Site hydrogeologic evaluation did not identify a continuous zone of saturation within the Dewey Lake. The few Dewey Lake wells yielding water for domestic and livestock purposes are believed to be completed in the thin, discontinuous lenticular sands where favorable groundwater recharge occurs (Mercer, 1983). Water in the middle Dewey Lake is a perched natural water-bearing zone as identified in WQSP-6A.

Unlike the natural groundwater in the middle Dewey Lake (WQSP-6A), perched anthropogenic water (PAW) occurs beneath the WIPP Site at a depth of less than 100 feet below ground surface at the contact between the lower Santa Rosa Formation [Santa Rosa] and upper Dewey Lake. This PAW yields generally less than one gallon per minute in monitoring wells and piezometers (PZs) and contains high concentrations of total dissolved solids (TDS) and chlorides. The origin of this water is believed to be primarily from anthropogenic sources (Daniel B. Stephens, 2003). The PAW occurs not only under the WIPP Site surface facilities but also about a half mile south of the Waste Handling Shaft.

The PAW occurs in the uppermost Permo-Triassic Dewey Lake and basal Triassic Santa Rosa. Some wells in the PZ series produced dry cuttings in the uppermost Dewey Lake Formation, indicating that saturation was limited to the Santa Rosa/Dewey Lake formational contact.

### **3.5 Ecology**

The biota of Los Medaños represent a transition between the northern Chihuahuan Desert and the southern Great Plains. The sandy soils form stabilized shrub coppice dunes interspersed with swales.

Shrubs and grasses are the most prominent components of the local flora. The area vegetation is composed of combined shinnery oak dune and grassland aspects that include perennial grasses (e.g., grama, dropseed, 3-awn) and shrubs (e.g., fourwing saltbush). Honey mesquite is an invasive tree that is also noticeable in the area. These are typical grassland and shrub land species that dominate the flora of the area.

The area supports an abundant and diverse population of mammals. Black-tailed jackrabbits and desert cottontails are the most observed. Other primary mammals include mule deer, desert dwelling rodents, and carnivores such as the coyote, gray fox, badger, and striped skunk.

A large variety of bird species are also found in the region. Densities vary according to migration, food and habitat availability. Scaled quail, mourning dove, loggerhead shrike, pyrrhuloxia, and black-throated sparrows are examples of bird inhabitants. The Harris's hawk, Chihuahuan raven, Swainson's hawk, Northern harrier, and American kestrel are also found at the Site.

Numerous varieties of amphibians and reptiles also occupy WIPP Site and its vicinity. Characteristic reptiles in the region include the western (ornate) box turtle, side-blotched lizard, western whiptail, bullsnake, and prairie rattlesnake. Representative amphibians are the tiger salamander, red-spotted toad, and plains spadefoot toad.

A more detailed formal listing of biota species occurring near or on WIPP Land Withdrawal Area is provided in the WIPP Land Management Plan, (DOE/WIPP-93-004). A brief summary of the ecological baseline surveys appears in Appendix H of the Final Environmental Impact Statement (DOE/EIS-0026).

#### **4.0 DOSE CALCULATIONS**

This section discusses dose calculations involving off-site dose assessment. Section 7.6 (Radiation Exposure Control) of the Waste Isolation Pilot Plant Documented Safety Analysis (DOE/WIPP-07-3372) summarizes the occupational dose limits and administrative control levels at WIPP.

The WIPP environmental program is designed to meet the expectation that during normal operations there is no detectable radiological contamination release to the environment. Even for routine periodic emissions calculations, the dose estimates have proved far below any regulatory limit for dose to a member of the public.

The DOE, with regards to the WIPP facility, is required to comply with environmental radiation protection standards in (40 CFR Part 191), Subpart A, *Environmental Standards for Management and Storage*. The WIPP-relevant portion of 40 CFR §191.03(b) that describes limits of facility dose to a member of the public in the general environment applies at the Exclusive Use Area (EUA) fence line (Figure 3-2). This requirement is described in section 2.5 of EPA 402-R-97-001, *Guidance for the Implementation of EPA's Standards for Management and Storage of Transuranic Waste (40 CFR Part 191, Subpart A) at the Waste Isolation Pilot Plant*. Documentation of compliance is acceptable, per section 2.7 of the guidance, using the CAP88-PC (Clean Air Act Assessment Package-1988) computer code.

WIPP must comply with the reporting requirements established in 40 CFR Part 61, Subpart H, and the memorandum of understanding (MOU) dated May 16, 1995, (DOE, 1995).

Emission monitoring and compliance procedures for DOE facilities (40 CFR §61.93[a]) require the use of CAP88-PC or other approved procedures, to calculate effective dose equivalents to members of the public. Calculations using the CAP88-PC model are made to verify that the annual effective dose equivalent to the maximally exposed individual, resulting from normal operations conducted at the WIPP facility, is below the 10-millirem-per-year limit given in 40 CFR Part 61, Subpart H, and the 0.1 millirem-per-year (mrem/yr) limit for periodic confirmatory measurements, (1.0 percent of 10 mrem-per-year) and is within the public dose limits of DOE Order 458.1.

Annual screening results are reported in the ASER demonstrating compliance with the DOE Order 458.1 dose constraint requirements for protection of biota.

## **5.0 ENVIRONMENTAL MONITORING PROGRAM**

Each facility under the control of the DOE is required to ensure the early identification of, and appropriate response to, potential adverse environmental impacts associated with operations. This must include appropriate preoperational characterization and assessment, and effluent monitoring. The DOE has complied with this requirement by compiling preoperational radiological and nonradiological data to use as a baseline for evaluating operational monitoring results.

An analysis of the historical preoperational data is contained in the following documents:

- Waste Isolation Pilot Plant RCRA Background Groundwater Quality Baseline Report (DOE/WIPP-98-2285)
- Addendum 1, Waste Isolation Pilot Plant RCRA Background Groundwater Quality Baseline Update Report (IT Corporation, 2000)
- Statistical Summary of the Radiological Baseline for WIPP (DOE/WIPP-92-037)
- Summary of the Salt Impact Studies at WIPP, 1984 to 1990 (DOE/WIPP-92-038)
- A Study of Disturbed Land Reclamation Techniques for WIPP (DOE/WIPP-92-039)
- Background Water Quality Characterization Report for WIPP (DOE/WIPP-92-013)

The environmental sampling programs used to establish the preoperational baseline were originally defined in chapter 5 of DOE/WIPP-88-028, Operational Environmental Monitoring Plan for the Waste Isolation Pilot Plant (DOE, 1989). The plan evolved into the current WIPP EMP. This EMP describes the current environmental monitoring efforts at WIPP during the operational (disposal) phase. Environmental monitoring data are summarized and published in the ASER as required by DOE Order 231.1B.

### **5.1 Guidelines**

It is the policy of the DOE to conduct effluent monitoring and environmental surveillance programs that are appropriate for determining adequate protection of the public and the environment during DOE operations and to ensure that operations comply with DOE and other applicable federal, state, and local radiation standards and requirements. It is the DOE's objective that its operations properly and accurately measure radionuclides in effluent streams and in the ambient environmental media.

A Guide for: Environmental Radiological Surveillance at US Department of Energy Installations (Corley et al., 1981) states that the factors that should be considered in determining the relative level of environmental surveillance required at a facility include the following:

- Potential hazard of the materials released, considering both expected quantities and relative radiotoxicities
- Extent to which facility operations are routine and unchanging
- Need for supplementing and complementing effluent monitoring
- Size and distribution of the exposed population
- Cost-effectiveness of increments to the environmental surveillance program
- Availability of measurement techniques that will provide sufficiently sensitive comparisons with applicable standard and background measurements

Use of the above guidance, and results of the risk analysis in the safety analyses for WIPP, indicate that operational dose estimates for WIPP are significantly below dose criteria, and are consistent with DOE's as low as reasonably achievable (ALARA) (10 CFR § 835.2, Definitions) concept. The WIPP EMP encompasses a comprehensive set of variables that detect environmental impacts. Also, the EMP scope and intensity may be adjusted using a graded approach appropriate to the situation, in response to changing facility processes, environmental conditions, and program results.

The values of the variables measured are derived from environmental radiological analysis of particulates in air; surface water, sediments, soils, and biota; the status of the local biological community; and groundwater quality measurements. Environmental samples are analyzed for natural uranium ( $^{233/234}\text{U}$ ,  $^{235}\text{U}$ , and  $^{238}\text{U}$ ) and potassium ( $^{40}\text{K}$ ); TRU actinides expected to be present in the waste, plutonium ( $^{238}\text{Pu}$ ,  $^{239/240}\text{Pu}$ ) and americium ( $^{241}\text{Am}$ ); major fission products, cesium ( $^{137}\text{Cs}$ ) and strontium ( $^{90}\text{Sr}$ ); and reactor structural materials, cobalt ( $^{60}\text{Co}$ ). Environmental levels of these radionuclides could provide corroborating information on which to base conclusions regarding releases from WIPP facility operations. The WIPP Airborne Effluent Monitoring Program also monitors for these same radionuclides with the exception of  $^{235}\text{U}$ ,  $^{40}\text{K}$ , and  $^{60}\text{Co}$  because they are not part of the source term from CH and RH TRU radionuclides with the highest potential to deliver a dose to an off-site receptor.

Nonradiological portions of the program focus on the immediate area surrounding the Site, whereas radiological surveillance generally covers a broader geographical area including nearby ranches, and villages and cities within a radius of 50 miles (80 kilometers) from the central point of the WIPP Site. Environmental monitoring will continue at the Site during project operations and through decommissioning and beyond.

The goal of the environmental monitoring program is to determine if the local ecosystem has been impacted during the pre-disposal and disposal phases of WIPP and, if so, to evaluate the severity, geographic extent, and environmental significance. Tables 5-1

and 5-2 summarize the environmental media sampled, frequency, analytical array, and number of sampling stations. These two tables mainly summarize the upper tier sampling requirements. Other locations and target analytes may be sampled as needed. Environmental and ecological sampling during operations will be adjusted, as appropriate, to fit the needs of the project.

The geographic scope of radiological sampling is based on projections of potential release pathways for the types of radionuclides in WIPP wastes, which is primarily through airborne transport. The radioisotopes measured, all of which are particulate in form, are selected from those contained in the repository that have the potential for contributing 10 percent or more of the overall calculated annual dose to a member of the public. Also, the surrounding population centers are monitored, even though release scenarios involving radiation doses to residents of those population centers are improbable.

Sampling and related activities are conducted in accordance with WIPP procedures. Standard sampling practices and techniques are used (see section 6.0, Data Analysis).

Quality assurance has been established within the framework of WP 13-1, Nuclear Waste Partnership LLC Quality Assurance Program Description (QAPD), and is referenced in section 7.0 of this EMP. When WIPP data are received, they are verified, validated, evaluated, and presented in the ASER.

Data are stored in various electronic databases on the network where they are backed up daily. Databases are maintained by the Environmental Monitoring & Hydrology (EM&H) group as data are added. Data are maintained through the Records Inventory and Disposition Schedule (RIDS) Program. Each sampling program has a RIDS, which defines the specific retention times and storage location of the records. When the data retention time for Site storage has been achieved, records are sent to the WIPP records center for permanent storage. Records are scanned and placed in the Documentum Database maintained by the WIPP record center. Retrieval of records can be from Documentum or files onsite depending on the status.

## **5.2 Radiological Environmental Monitoring**

The operational environmental surveillance program will continue, with some modifications of the preoperational program and variables monitored during the radiological baseline program and ecological monitoring program, during the disposal phase. Each sampling subprogram of the EMP is described below.

### **5.2.1 Airborne Effluent Monitoring**


The WIPP facility has several effluent air monitoring stations, designated as Stations A, B, C, and H (Figure 5-1):

- Station A samples represent unfiltered air exiting from the exhaust shaft.
- Station B samples represent high-efficiency particulate air (HEPA)-filtered air exiting from the exhaust shaft.
- Station C samples represent HEPA-filtered exhaust from the Waste Handling Building to the atmosphere.
- Station H samples represent unfiltered air exiting from the exhaust shaft and the 700-C fan ductwork.

An auxiliary parallel set of filters, the Interim Ventilation System (IVS), was installed and tested in calendar year (CY) 2016 to increase the filtered exhaust capacity required for restart of waste emplacement. In CY 2018, the Supplement Ventilation System (SVS) was constructed. The SVS began operation in CY 2019. The SVS consists of an auxiliary fan installed in the S-90 drift to provide additional ventilation air to the underground. Use of the SVS minimizes dust particulate loading on the underground ventilation system's HEPA filtration units since the construction split will take clean air from the surface and will exhaust salt dust laden air out the Salt Handling Shaft (SHS). This location is classified as a Potential Impact Category (PIC) 4 source in accordance with ANSI/HPS N13.1-1999 since the potential to emit is less than or equal to 0.0001 fraction of the allowable limit. When in operation, the SHS is monitored by a portable air sampler. A high-capacity ventilation filtration system, the Safety Significant Confinement Ventilation System (SSCVS), is being designed to replace the IVS and allow return to normal mining and disposal operations.

The WIPP facility uses skid-mounted fixed air samplers (FAS) at each effluent monitoring station to collect representative samples of airborne particulates. Sample filters are collected at the Stations A, B, and H FAS on a daily basis or more frequent depending on ventilation configuration changes. Station C FAS filters are collected weekly, and as needed. These locations are considered a PIC 3 source since the dose has the potential to emit radiological contaminants greater than 0.0001 percent and less than or equal to 0.01 percent of the allowable limit in accordance with ANSI/HPS N13.1-1999. Filters from these monitoring stations are typically analyzed for gross alpha and beta activity, and re-counted after short-lived naturally-occurring radioactivity (e.g., isotopes of Radon) has decayed. The radioactivity-screened sample filters are then composited and submitted to the WIPP Laboratories for isotopic analysis. Generally,

Station A, B, and H samples are composited monthly, and Station C samples are composited quarterly. For the purposes of measuring emissions from the Exhaust Shaft, Station A and Station H data will be compared and the more conservative value will be used when calculating release values from the Exhaust Shaft. The results are reported annually in the Annual Periodic Confirmatory Measurement National Emission Standards for Hazardous Air Pollutants (NESHAP) Compliance Report, summarized in the ASER, and reported every other year (on an annual basis) in the Biennial Environmental Compliance Report (BECR).

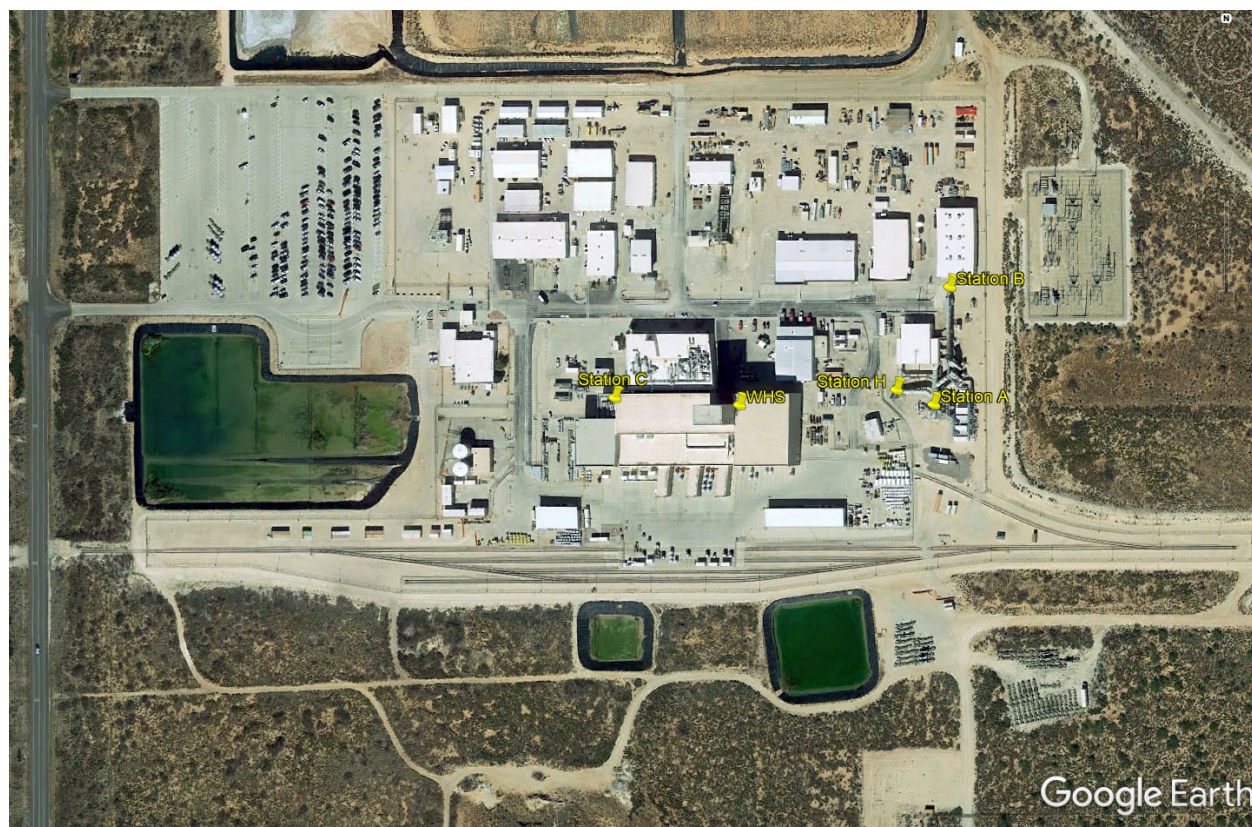

**Figure 5-1 – Location of Effluent Monitoring Locations**

### **5.2.2 Airborne Environmental Surveillance**

The atmosphere has been established as the most credible exposure pathway to the public from WIPP. Therefore, ambient airborne particulate sampling for alpha-emitting radionuclides is emphasized in the EMP as a primary component of environmental surveillance. Air sampling results are used to trend environmental radiological levels and determine if there has been a deviation from established baseline and current background radiological levels.




To determine the number of ambient air sampling stations and their placement, demographic and meteorological data for the Site were examined to determine the distance to local population centers, the population distribution, and the wind speed frequency distribution and weighing factors, which are scaled to equal the desired number of sampling locations. Locations were selected to avoid areas where large (non-respirable) fugitive dust particles can dominate the sample.

Generally, low-volume air particulate samplers (LO-VOLs) operate at an average flow rate of 2 standard cubic feet per minute (scfm) (0.056 cubic meters/minute) with a maximum of  $\pm 0.2$  scfm ( $\pm .0056$  cubic meters/minute) deviation and a current sample head height between 5 feet 6 inches (168 cm) and 6 feet 2 inches (188 cm) to represent the typical breathing zone. Legacy installations for samplers were done in accordance with siting criteria contained in regulations and standards in effect at the time. Location and sample head heights were updated in calendar year (CY) 2014 to meet the basic criteria of both the DOE guidance and the EPA 40 CFR Part 58 Appendix E, Probe and Monitoring Path Siting Criteria for Ambient Air Quality Monitoring, specifications for PM<sup>10</sup> particulate air sampling (Corley, et al, 1981; DOE/EH-0173T; DOE-HDBK-1216-2015).

The current LO-VOL sampling array (Figure 5-2) consists of seven primary sampling stations (designated with subprogram code AL), the locations of which provide as much continuity as possible between baseline and operational data. Primary LO-VOL samplers are at Carlsbad, Smith Ranch, Mills Ranch, WIPP South, WIPP East, WIPP Far Field, and the Southeast Control sites. These are designated AL-CBD, AL-SMR, AL-MLR, AL-WSS, AL-WEE, AL-WFF, and AL-SEC. The Southeast Control background site is located approximately 12 miles southeast of WIPP in the predominant upwind direction from WIPP. One duplicate sampler is installed at a primary sampling location and moved every calendar quarter to a different primary sampling location as a quality control measure. Exclusive of the Carlsbad location, vegetation and soil sampling are also performed near these locations as described in sections 5.2.4 and 5.2.5, respectively.



### Active DOE Air Sampling Sites

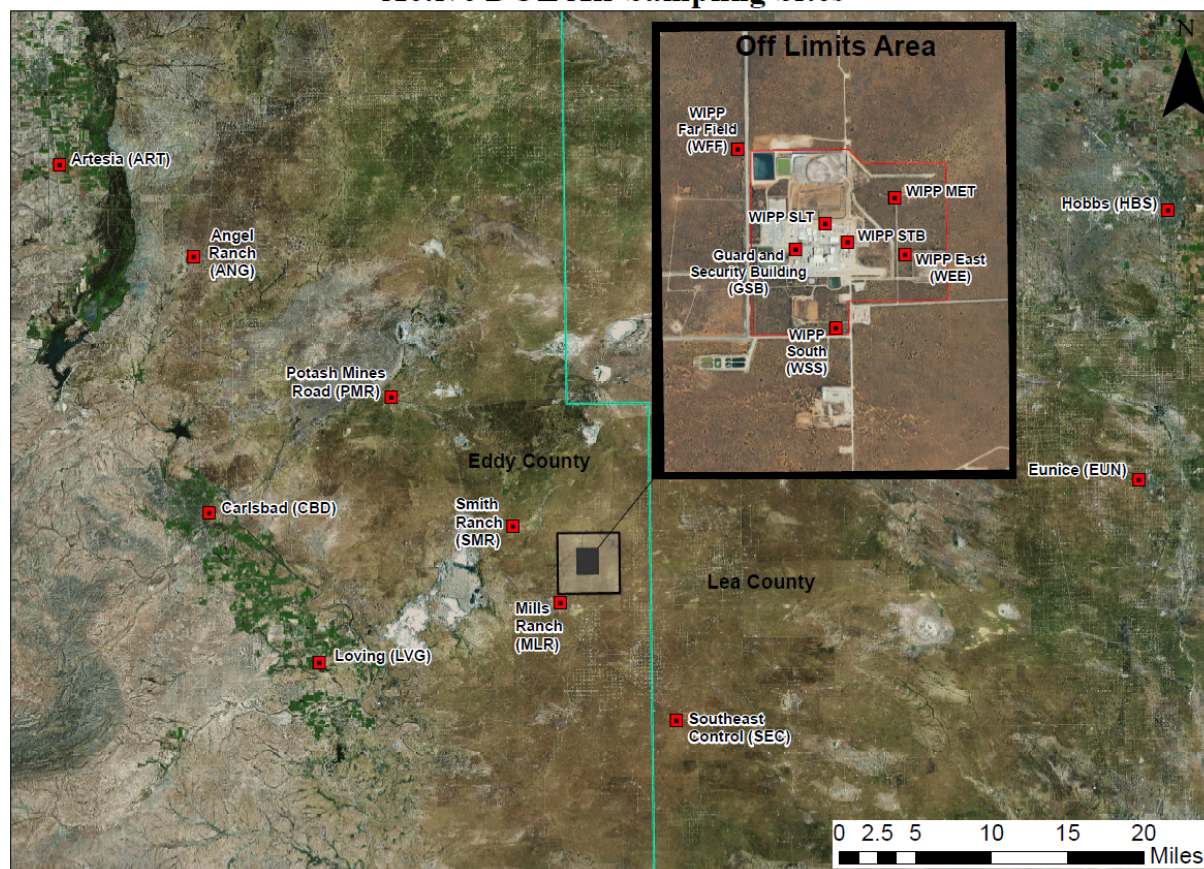

**Figure 5-2 - Air Sampling Sites**

Installed in CY 2014 at each of the seven primary locations are event evaluation samplers (designated with subprogram code EE), running with an identical set of operational parameters (e.g., sample head height, sample head configuration, flow rates, sample filter type/size, analytical suite when analyzed) as the co-located primary samplers. The EE sample filters are to be preferentially exchanged for screening analysis in the case of an accidental release of radionuclides, leaving the primary sampler to continue to integrate the sample at the location on the normal schedule. These are designated EE-CBD, EE-SMR, EE-MLR, EE-WSS, EE-WEE, EE-WFF, and EE-SEC.

Two more sets of LO-VOL EE samplers were added in CY 2014 (Figure 5-2). The first set was an inner ring of four on-site samplers that collect ambient air both inside the Property Protection Area (PPA), and just outside the PPA within several hundred meters of the PPA fence at selected locations to fill in gaps not covered by the primary samplers. These are designated EE-MET, EE-GSB, EE-SLT, and EE-STB.

The second set of EE samplers are LO-VOL installations at or near the six previously-used preoperational monitoring locations. These sampler locations range from 10 to 50 miles in radius from the central point of the WIPP Site and, if required, sample data from these locations could be compared to the pre-operational baseline

data. The EE sampling also incorporates duplicate samples as a QC measure. These are designated EE-ART, EE-ANG, EE-PMR, EE-EUN, EE-LVG, and EE-HBS.

Ambient airborne particulate sampling at these 24 samplers at 17 locations is performed in accordance with WP 02-EM1012, Airborne Particulate Sampling, which include steps for exchanging LO-VOL filters, desiccation, weighing and transmittal to a laboratory for determining gross alpha and beta activity using a gas flow proportional counter. As needed (e.g., during power outages, construction activities), portable sampling units can be used and may have slightly different operational parameters. Quarterly composites of filters from each primary location undergo specific radionuclide analysis as indicated in table 5-2. Event evaluation sample filters are held as backup for radioisotope analysis as needed. Although these ambient air particulate collectors are not used as quantitative effluent monitoring samplers, the calculated concentrations from the ambient air samples may be used to support dispersion estimates derived from the effluent air particulate samples.

In the case of a detected unplanned release, emergency response and radiological control measures include immediate screening of applicable EE samplers for radioactivity by radiological protection teams (per WP 12-ER4924).

Waste Isolation Pilot Plant Environmental Monitoring Plan  
DOE/WIPP-99-2194, Rev. 12

<b>Table 5-1 - Environmental Monitoring Sampling</b>			
<b>Program</b>	<b>Type of Sample</b>	<b>Sampling Locations <sup>1</sup></b>	<b>Sampling Frequency</b>
Radiological	(1) Airborne effluent	2	Periodic/confirmatory
	(2) Airborne particulate	17 EE with 7 co-located AL samples (Figure 5-2)	Weekly
	(3) Liquid effluent	1 (WHS sump)	As needed
	(4) Biotic (wild fauna)		
	Quail species, Catfish species, Rabbits (Desert Cottontail), Javelina (Collared Peccary), Mule Deer	Per permit authorizing collection	As available
	(5) Biotic (Beef)	WIPP vicinity	As available and as permitted by rancher
	(6) Vegetation	6 (Figure 5-4)	Annual, as available
	(7) Soil	6 (Figure 5-4)	Annual, as available
	(8) Surface water <sup>2</sup>	12 co-located with sediment and 3 on site (Figure 5-3)	Annual, as available
	(9) Sediment	12 (Figure 5-5)	Annual
	(10) Groundwater	6 (Figure 5-7)	Annual
Nonradiological	(11) Meteorology	1 (Figure 5-2)	Continuous
	(12) Volatile organic compound (VOC) Monitoring – Permit Part 4 and Attachment N		
	VOCs - Surface	2	2 times per week
	VOC – Disposal Room	# of active panel disposal rooms	Routinely once every two weeks; increasing to weekly as needed per Permit conditions
	(13) Groundwater	6 (Figure 5-7)	Annual
	(14) Perched anthropogenic water (DP 831, conditions 23 and 24)	12 sampled (Figure 5-8)	Semi-annual from PZ-1, PZ-5, PZ-6, PZ-7, PZ-9, PZ-10, PZ-11, PZ-12, PZ-13, C-2507, C-2811, WQSP-6a
	(15) H-19 storm water and salt storage ponds (DP-831, conditions 18 and 20)	7 (Figure 5-8)	As available,; semiannual for H-19 and after a significant storm event (defined by DP-831) or annually (whichever is more frequent) for other ponds
	(16) Settling Lagoons 1 and 2 (DP-831, condition 16)	2 (Figure 5-8)	Semi-annual

<sup>1</sup>Counts do not include duplicates. The number of certain types of samples taken can be driven by site conditions. For example, during dry periods there may be no surface water to sample at certain locations. Likewise, the number of samples for biota will also vary. For example, the number of rabbits available as samples of opportunity will vary as will fishing conditions that are affected by weather and algae levels in the water.

<sup>2</sup>Includes a nonradiological program component.

Waste Isolation Pilot Plant Environmental Monitoring Plan  
DOE/WIPP-99-2194, Rev. 12

<b>Table 5-2 - EMP Analytical Array</b>	
<b>Type of Sample</b>	<b>Analysis</b>
(1) Airborne effluent	Specific radionuclides <sup>1</sup>
(2) Airborne particulate	Specific radionuclides, gross alpha, gross beta, and total suspended particulate. Gross alpha and beta weekly; specific radionuclides of quarterly composites. <sup>1</sup>
(3) Liquid effluent	Specific radionuclides <sup>1</sup>
(4) Biotic (wild fauna)	Specific radionuclides <sup>1</sup>
(5) Biotic (Beef)	Specific radionuclides <sup>1</sup>
(6) Vegetation	Specific radionuclides <sup>1</sup>
(7) Soil	Specific radionuclides <sup>1</sup>
(8) Surface water	Specific radionuclides <sup>1</sup>
(9) Sediment	Specific radionuclides <sup>1</sup>
(10) Groundwater	Specific radionuclides <sup>1</sup>
(11) Meteorology	Temperature, wind speed, wind direction, precipitation, relative humidity, barometric pressure, and solar radiation
(12) VOC Monitoring	Permit-required target VOCs, tentatively identified VOCs, and other VOCs as requested or directed by the New Mexico Environment Department
(13) Groundwater	Indicator parameters and hazardous constituents <sup>2</sup>
(14) Perched anthropogenic water (DP-831, conditions 23 and 24)	Field parameters for temperature, pH, and specific conductance; SO <sub>4</sub> , TDS, Cl (total Kjeldahl nitrogen [TKN] and NO <sub>3</sub> at WQSP-6A only)
(15) H-19 and storm water and salt storage ponds (DP-831, conditions 18 and 20)	SO <sub>4</sub> , Cl, TDS
(16) Settling Lagoons 1 and 2 (DP-831, condition 16)	TKN, NO <sub>3</sub> -N, SO <sub>4</sub> , TDS, Cl
(17) Effluent Lagoons B and C	SO <sub>4</sub> , Cl, TDS

<sup>1</sup>Specific radionuclides: <sup>241</sup>Am, <sup>60</sup>Co, <sup>137</sup>Cs, <sup>40</sup>K, <sup>238</sup>Pu, <sup>239/240</sup>Pu, <sup>90</sup>Sr, <sup>233/234</sup>U, <sup>235</sup>U, <sup>238</sup>U, gross alpha, and gross beta; <sup>60</sup>Co, <sup>40</sup>K, and <sup>235</sup>U excluded for airborne effluent.

<sup>2</sup>Permit Part 5, section 5.4. Specific hazardous constituents required by Permit appear in 40 CFR Part 264, Appendix IX.

NOTE 1: Gross alpha and gross beta are analyzed in the air samples only. Effluent air samples are not analyzed for <sup>40</sup>K, <sup>60</sup>Co, or <sup>235</sup>U.

### 5.2.3 Aqueous Phase Effluent Monitoring

DOE Order 458.1 sets dose limits and requires monitoring of liquid effluent streams. The most recent DOE handbook update, Environmental Radiological Effluent Monitoring and Environmental Surveillance, DOE-HDBK-1216-2015 (DOE, 2015a), sets the standard for meeting the requirements of DOE Order 458.1. Liquid effluent monitoring is necessary to quantify radionuclides released to the environment and to alert operators of process inconsistencies and malfunctions of system controls.

Above-ground condensation from underground ventilation ducts, and seepage from the repository passages and shafts contribute a stream of potentially radiologically contaminated aqueous fluids that is managed within Site radiological controls. Fluids determined to be detectably contaminated are shipped off-site to a facility authorized to accept such materials for disposition. None of these fluids are released to the environment at the WIPP Site.

There is a sump in the waste handling shaft (WHS) that collects liquids from throughout the WHS. Water collected in the sump may be sampled and analyzed for specific radionuclides as shown in table 5-2. The liquid effluent would then be characterized and disposed of in accordance with applicable regulations.

Brine collected from the ventilation ducts and the underground repository are sampled and analyzed for radioactive and hazardous waste constituents. Since the only hazardous waste constituents that can reasonably contaminate the brine associated with the repository are the metals, total Resource Recovery and Recovery (RCRA) metals are performed on the brine to determine the hazardous waste characterization of the brine.

As discussed above, water collects in various places from either condensation or by ground water seepage. (1) In the ventilation ductwork on the surface, water condenses on the walls of the ductwork where it dissolves salt from the mine air. The ductwork brine drains into collection basins. (2) The Waste Shaft has a sump located at the bottom of the shaft. Water collects in the sump from condensation on the walls of the shaft and by ground water seepage. This water dissolves salt on the sides and in the sump of the Waste Shaft and then collects in the shaft sump. Because the water dissolves salt in both of these instances, the water becomes saturated with salt and becomes brine.

Water is pumped from the various collection basins at the ventilation ductwork and at the Waste Shaft sump into 300-gallon totes. The full totes are staged in an area designated as a rad area and are managed as mixed low-level radiological waste pending analyses. Samples are taken from the totes analyzed for RCRA heavy metals and plutonium and americium.

Depending on the outcome of the analyses mentioned above, the brine can be disposed of in one of four ways. (1) If no RCRA or radiological constituent is detected, the brine will be disposed of in Evaporation Pond H-19. (2) If only RCRA metals are detected, the brine will be disposed as hazardous waste at a permitted off-site facility. (3) If only

plutonium and/or americium are detected, the brine will be disposed of as low-level radiological waste at a permitted off-site facility. (4) If RCRA metals are detected along with plutonium and/or americium, the brine is disposed of as mixed low-level radiological waste at a permitted off-site facility.

#### **5.2.4 Biotic Sampling**

Biotic sampling (wild fauna) is authorized under a collector's permit issued by the New Mexico Department of Game and Fish and is performed in accordance with WP 02-EM1011, Biotic Sampling. In addition, range cattle are collected when available and authorized by the rancher. Collection and analysis of biotic samples (e.g., quail, rabbits, beef/deer, javelina, and fish) accomplishes the following:

- Evaluates the potential radiation doses received by way of human consumption
- Predicts the possible contaminant concentrations in available biota
- Monitors trends in environmental contamination and possible long-term accumulation of radionuclides

Vegetation sampling is performed in accordance with WP 02-EM1019, Vegetation Sampling. Vegetation samples are collected from the locations indicated in Figure 5-4, in the vicinity of ambient air particulate sampling locations.



31

Catfish are collected annually, as available, from the Pecos River near Carlsbad and from Brantley Lake (a manmade reservoir located on the Pecos River between Artesia and Carlsbad). Several whole specimens (as found analysis) may be composited to meet analytical mass requirements. Samples are analyzed as shown in table 5-2. For all samples, sufficient biotic material is collected or composited to meet analytical laboratory measurement requirements for sensitivity to the specified radioanalytical methods.

### **5.2.5 Soil Sampling**

Soil samples are collected annually from the six locations shown in Figure 5-4. Sampling sites are co-located in the vicinity of six of the air particulate sampling locations, and the vegetation sampling sites, as recommended in HASL-300, Environmental Measurement Laboratory Procedures Manual and DOE-HDBK-1216-2015. The annual frequency of sampling also follows the guidance contained in DOE-HDBK-1216-2015 for obtaining long-term accumulation trends. Samples are currently being collected per WP 02-EM1009, Soil Sampling, in three nominal incremental profiles: surface (shallow) soil (0 to 2 cm [0 to 0.8 in]), intermediate soil (2 to 5 cm [0.8 to 2 in]), and deep soil (5 to 10 cm [2 to 4 in]). The soil samples are analyzed as indicated in table 5-2, and the analytical results serve to provide data for long-term trend analysis.

### **5.2.6 Surface Water Sampling**

Surface water collection is performed in accordance with WP 02-EM1017, Surface Water and Sediment Sampling. Surface water samples are co-collected with sediment samples annually (when water is available, see table 5-1), from up to 12 locations, in the WIPP vicinity as shown in Figure 5-3 and 5-5. Naturally-occurring surface water is absent within the WIPP Land Withdrawal Area. The sampling locations selected represent both the major bodies of surface water and potential livestock uptake locations in the WIPP vicinity and provide time-series data concerning the surface water pathway. On the Pecos River there are four sampling locations: the Upper Pecos River near Artesia, Brantley Lake, Carlsbad, and Pierce Canyon. Eight dirt tanks (earthen catchment basins) are used by area ranches to collect precipitation runoff water for livestock. These tanks are Tut, Noya, Red, Indian, Lost, Bottom of the Hill, Poker Trap, and Hill. Analyses are performed as specified in table 5-2. Some of the locations are on private property and are sampled when access is granted.

Drinking water is sampled as surface water at the pump house (FWT) from the WIPP water supply system, piped in from a remote public water well source. The pump house and associated tankage is the facility which receives/stores the fresh water that is supplied to the Site. This water and samples from H-19 and sewage lagoon, are sampled annually and analyzed for the constituents listed in table 5-2.

All the sampling in the environmental surface-water monitoring program is conducted using a grab sample technique. There are no permanent sample stations, equipment, or conduit tubing involved using this technique.



### 5.2.7 Sediment Sampling

Sediment sampling is performed in accordance with WP 02-EM1017. Sediment samples are collected annually from near the WIPP Site (Figure 5-5) and analyzed for specific radionuclides noted in table 5-2. The sediment sample locations are co-located with the off-site surface-water sample locations. The analytical results for the sediment sample analysis are reported annually in the ASER, and serve to provide data for long-term trend assessments.

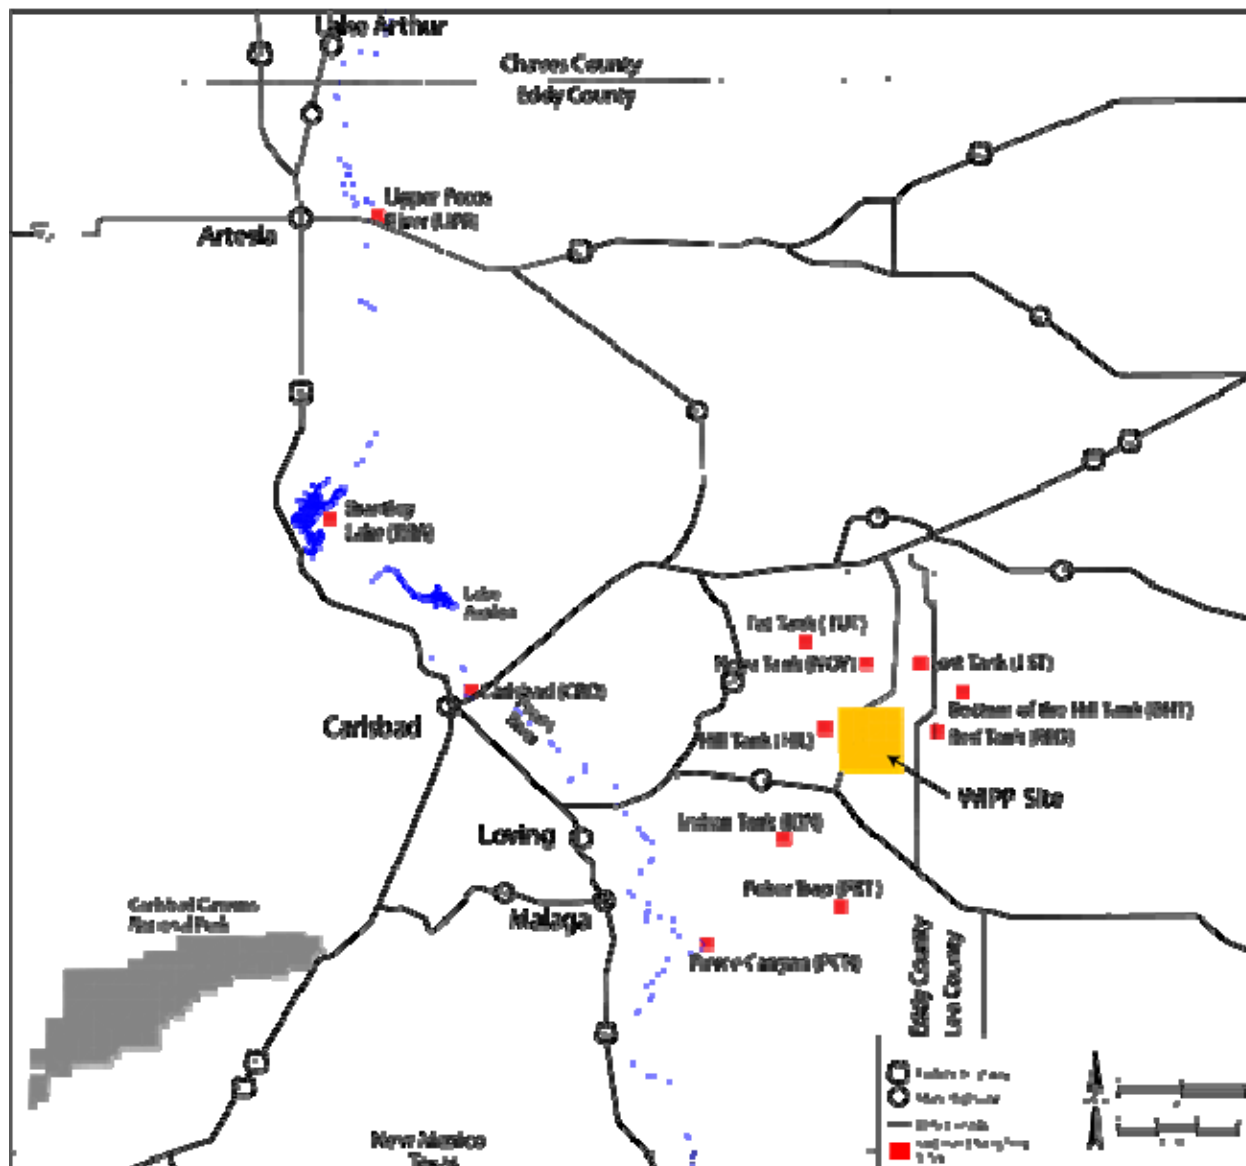


Figure 5-4 - Sediment Sampling Sites


### 5.2.8 Groundwater Sampling

Groundwater, which may potentially be affected by DOE operations, must be monitored to detect and document the effects of such operations on groundwater quality and quantity, and to show compliance with applicable federal and state laws and regulations. The groundwater monitoring programs (GMPs) are conducted on or near the WIPP Site to:

- Obtain data to determine baseline conditions of groundwater quality and quantity
- Demonstrate compliance with and implementation of applicable regulations and DOE orders
- Provide data for the early detection of groundwater contamination
- Identify existing and potential groundwater contamination sources and maintain surveillance of these sources
- Provide data upon which decisions can be made concerning land disposal practices and the management of groundwater resources

Though listed under the radiological program, meeting the requirements of DOE Order 458.1 and the guidelines of the DOE Handbook of Environmental Radiological Effluent Monitoring and Environmental Surveillance, DOE-HDBK-1216-2015, the GMP also supports the Detection Monitoring Program (DMP) as mandated by 20.4.1 New Mexico Administrative Code and the EPA Compliance Certification Application as mandated by 40 CFR Part 194, Criteria for the Certification and Recertification of the Waste Isolation Pilot Plant's Compliance with the 40 CFR Part 191 Disposal Regulations. These DMP requirements dictate a broader set of nonradiological indicator parameters and hazardous constituents for measurement. The GMP includes two subprograms, the Water Level Monitoring Program (WLMP) and the DMP.

The WLMP involves collecting monthly water level measurements from available Culebra wells (Figure 5-6) at and near WIPP, in accordance with Permit Attachment L, Table L-4 and WP 02-1 WIPP Groundwater Monitoring Program Plan. Groundwater surface elevations are monitored on a monthly basis to supplement the area water-level database and to help define regional changes in groundwater gradients and flow directions. These data are reported in semi-annual and annual groundwater reports and in the ASER. Groundwater level measurement is performed in accordance with WP 02-EM1014, Groundwater Level Measurement. Collection of groundwater-level data assists the DOE in meeting performance assessment requirements, regulatory compliance requirements, and permitting requirements.

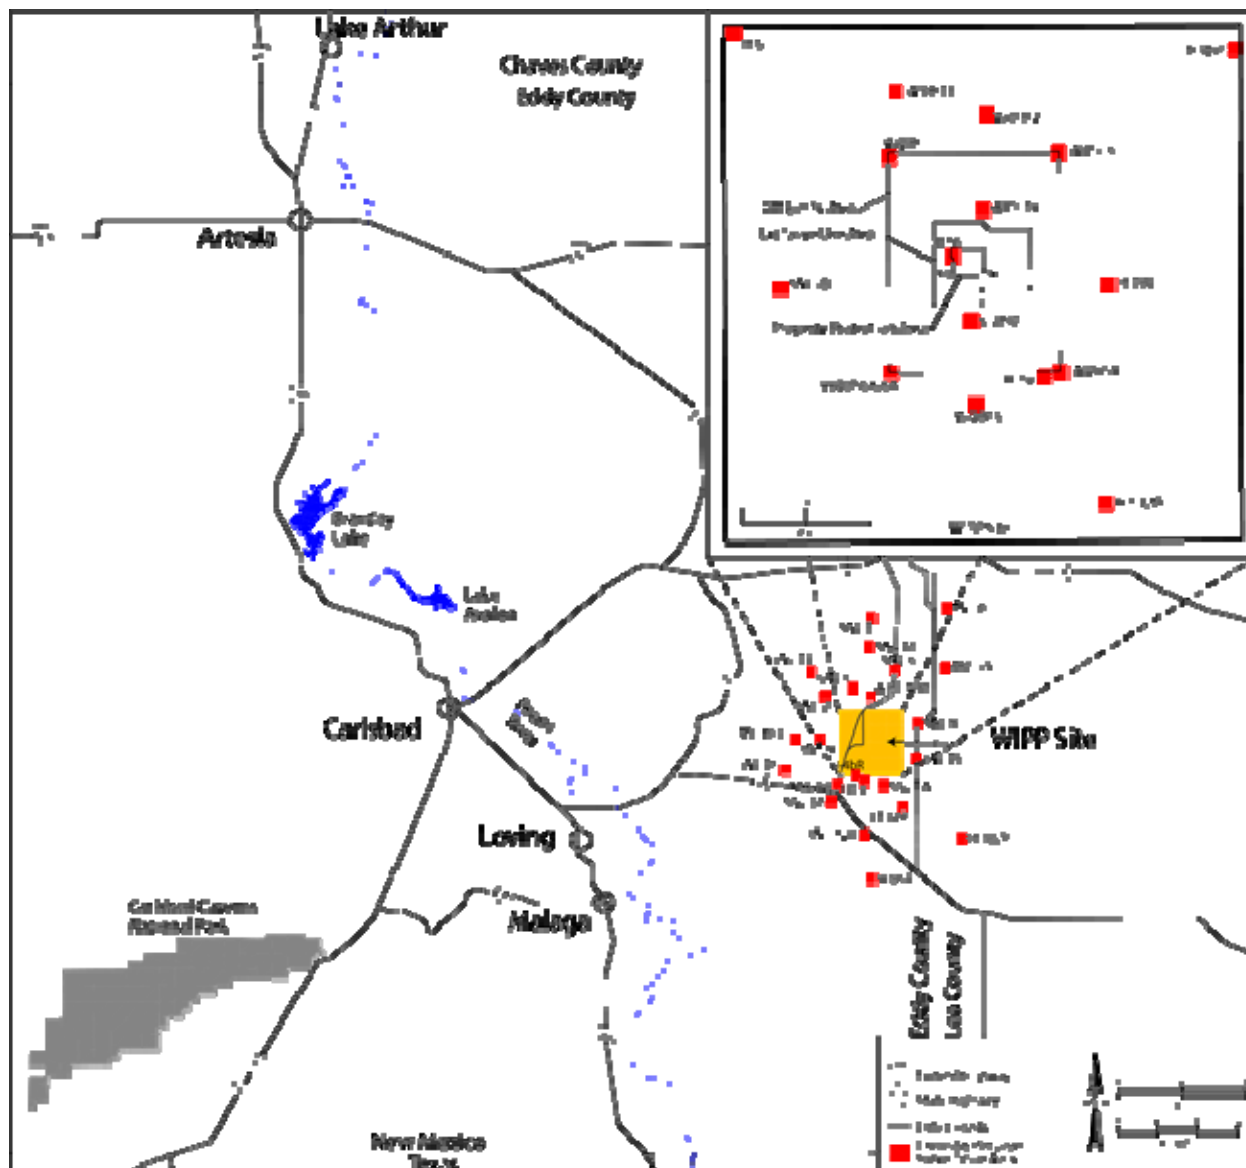

**Figure 5-5 - Groundwater Level Surveillance Wells**

The DMP groundwater samples are collected from the wells noted on Figure 5-6. Both field parameters and final samples are collected. Field parameter measurements are taken at regular intervals and analyzed in the mobile field laboratory for various physical and chemical characteristics, called field indicator parameters. The field parameter data are used to determine whether the sample is representative of undisturbed groundwater as a direct function of the volume of water being purged from the well. As required by the WIPP Hazardous Waste Facility Permit (Permit), the wells will be purged no more than three well-bore volumes or until field parameters have stabilized, whichever occurs first, before final samples are collected. The final samples are sent to analytical laboratories for analysis of hazardous constituents and indicator parameters. Samples are sent to WIPP Laboratories, or an alternate laboratory, for analysis of specific radionuclides. The protocols for the collection and analysis of final samples and field

parameter measurements are contained in WP 02-EM1010, Field Parameter Measurements and Final Sample Collection.

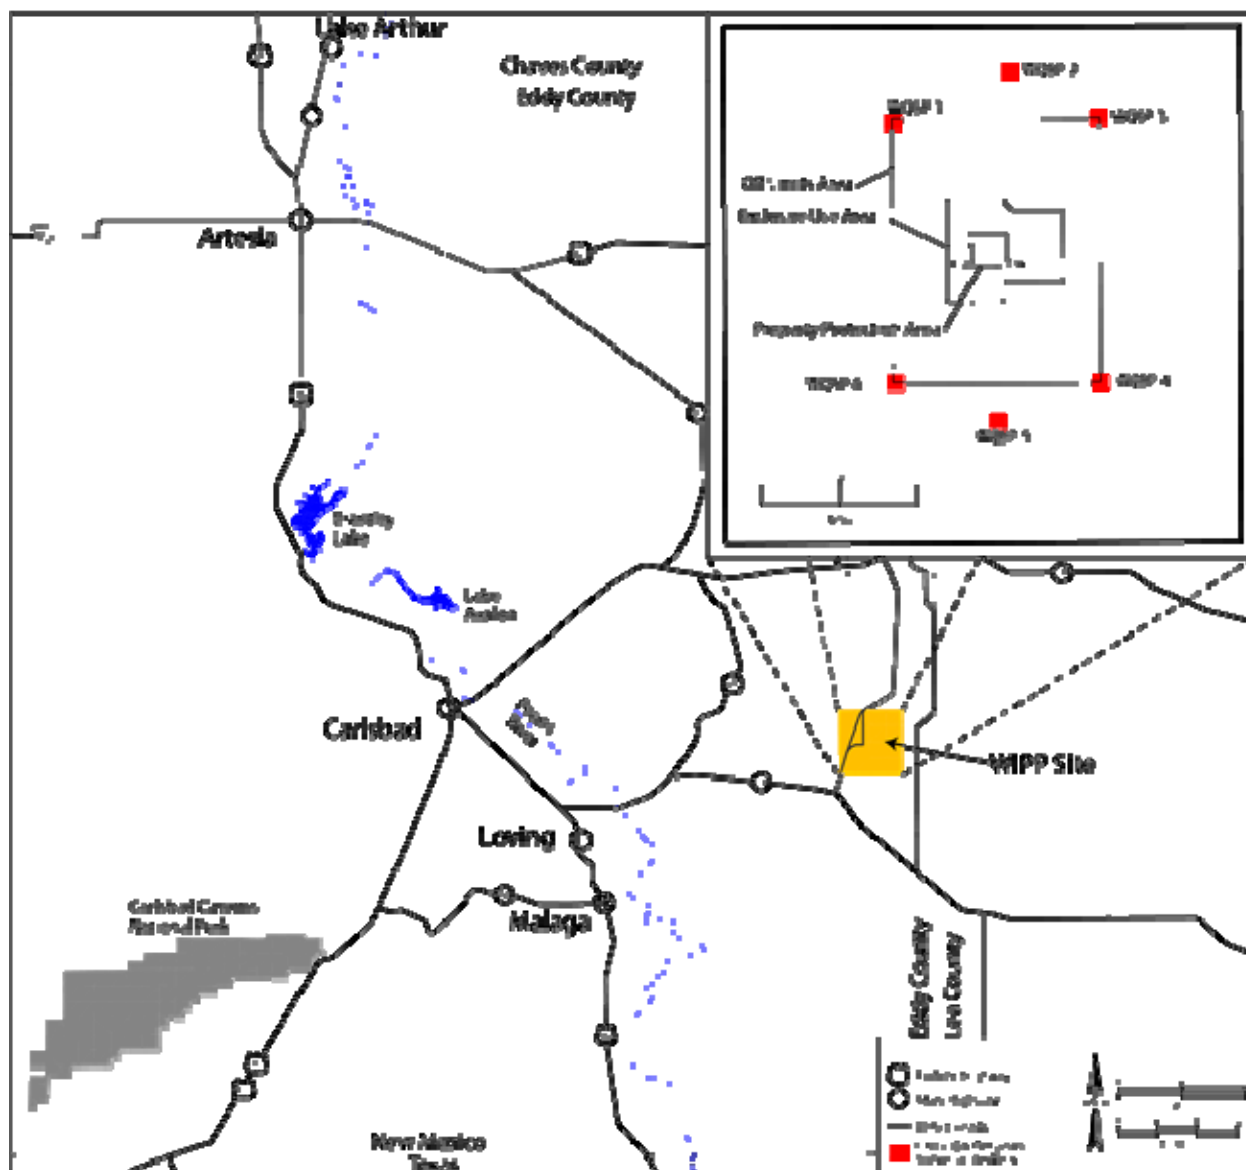


Figure 5-6 - Groundwater Sampling Locations

DMP sampling is performed annually in six wells at WIPP. WQSP-1 through WQSP-6 are completed in the Culebra Dolomite Member of the Rustler Formation. The wells are constructed to EPA standards to meet the DMP standards under the Permit. The analytical results for samples collected from the DMP wells are reported in the Annual Culebra Groundwater Report and in the ASER.

### **5.3 Nonradiological Environmental Monitoring**

Nonradiological environmental monitoring activities at WIPP are governed by a comprehensive set of sampling programs designed to detect and quantify impacts of construction and operational activities. The requirements and objectives of both preoperational and operational nonradiological environmental monitoring are described in the Final Environmental Impact Statement, Waste Isolation Pilot Plant (DOE/EIS-0026). The ecological monitoring program focuses on nonradiological effects, which are ongoing.

Section 2.5 of Appendix J of the WIPP Final Environmental Impact Statement (FEIS) states:

The operational ecological monitoring program, building on the foundation established through preoperational ecological monitoring, will document the ecological effects of construction and operation and will focus primarily on indicator organisms and selected abiotic parameters.

Primary guidance for ecological monitoring was derived from the WIPP FEIS and the American Institute of Biological Scientists evaluation of the original WIPP biology program. Table 5-2 lists analytical parameters that will be monitored for evidence of possible site impacts. Results of supporting studies are published in the ASER.

#### **5.3.1 Meteorological Monitoring**

Atmospheric releases are the most credible pathway during WIPP operations. The WIPP meteorological program, established by DOE-HDBK-1216-2015, addresses the monitoring of potential releases. DOE-HDBK-1216-2015 provides guidance on how each DOE site is to establish a meteorological monitoring program appropriate for the activities at the site and for the local topography and demography. Meteorological variables are monitored and recorded to supplement characterization of the local environment and facilitate the interpretation of data from other environmental monitoring activities at WIPP. The WIPP meteorological program is performed in accordance with the WIPP Meteorological Program (WP 02-EM.01), which was written in accordance with the guidance contained in Meteorological Monitoring Guidance for Regulatory Modeling Applications (EPA-454/R-99-005).

The meteorological monitoring station is a 52-meter (170-ft) tower located at the meteorological tower (MET) air sampling site in the northeast corner of the EUA (Figure 5-1). Temperature, wind speed, and wind direction are monitored at 2, 10, and 50 meters (7, 33, and 164 feet, respectively); barometric pressure, humidity, solar radiation, and precipitation are also monitored at this location. Measurements are recorded in the Central Monitoring System, which tracks numerous real-time variables on a centralized computer system.

### 5.3.2 VOC Monitoring

A repository volatile organic compound (VOC) monitoring program was implemented as specified in the Permit after approval by the New Mexico Environment Department on October 27, 1999. The Repository VOC Monitoring Program is designed to monitor the VOC concentrations that the non-waste surface-workers are exposed to that are attributable to mixed transuranic (MTRU) emplaced in the underground. The monitoring program's objective is to confirm that the running annual average risk to the non-waste surface worker due to VOCs in the air emissions from the Underground Hazardous Waste Disposal Units (HWDUs) do not exceed the specified Permit regulatory limits. An Underground HWDU is a single excavated panel consisting of seven rooms and two access drifts designated for disposal of TRU waste. The target compounds selected for monitoring together represent approximately 99 percent of the carcinogenic risk due to air emissions of VOCs.

The Permit-required repository VOC sampling locations are Station VOC-C, located at the west side of Building 489, and a background location, Station VOC-D, at groundwater monitoring well WQSP-4. Repository VOC sampling is performed using a commercially available portable passive air sampling kit (PASK) and samples taken two times per week at each location, per Permit Attachment N, Section 3d(1). Each sample is set to collect as a 24-hour time-integrated sample consistent with U.S. Environmental Protection Agency (EPA) Compendium Method TO-15, Determination of Volatile Organic Compounds (VOCs) in Air Collected in Specially-Prepared Canisters and Analyzed by Gas Chromatography/Mass Spectrometry (GC/MS) (EPA 625/R-96/010b). Other sampling details are described in WP 12-VC1685, Subatmospheric Air Sampling in Passivated Canisters.

There is a disposal room VOC monitoring program was to monitor VOCs in an Underground HWDU in which waste has been emplaced. In accordance with Permit Attachment N, Section N-3d(2), this sampling is routinely performed once every two weeks but increasing to weekly as needed per Permit conditions. The disposal room VOC monitoring program was implemented to confirm that the concentration of VOCs in the air of closed and active rooms of an open/active panel do not exceed the specified Permit regulatory limits. Excluding Room 1, sample heads are installed in the intake and exhaust drift of the disposal rooms of an Underground HWDU. Only one sample head is installed in Room 1, in the exhaust drift. Monitoring of a closed room of an active panel occurs at both the inlet (intake) and exhaust location. Monitoring of a disposal room receiving waste for emplacement occurs only at the exhaust location. Excluding Room 1 intake, disposal room VOC monitoring of closed and active rooms of an active panel is performed until commencement of panel closure activities.

VOC sampling is performed using sampling concepts found in EPA Compendium Method TO-15. Analysis of the samples is performed at a contract laboratory using standard operating procedures that may be based on the concepts found in TO-15, the draft EPA Contract Laboratory Program Volatile Organics Analysis of Ambient air in Canisters (EPA, 1994), EPA Method SW-846 8260B (EPA, 1996), or ASTM International D-1946 (ASTM, 2006). Additional program details can be found in WP 12-VC.01, Volatile Organic Compound Monitoring Plan. The results for the program are reported semi-annually in data summary reports and annually in the ASER.


### **5.3.3 Groundwater Surveillance**

The WIPP groundwater DMP was described in section 5.2.9. Table 5-2 indicates the non-radiological groundwater parameters monitored using standard wet chemistry analytical methods. These methods are used to analyze for standard indicator parameters such as pH, specific conductance, specific gravity, and temperature. In addition to the indicator parameters, data are also gathered for hazardous constituents listed in Part 5 of the Permit. Hazardous constituents listed in Part 5 include metals, VOCs, and semi-volatile organic compounds.

### **5.3.4 WIPP Perched Anthropogenic Water Monitoring**

The objective of the WIPP perched anthropogenic water (PAW) program is to establish, by means of water-level monitoring and water-sample analysis, accurate and representative data in support of DP-831. This program documents the PAW quality through time to determine the effectiveness of source-control measures. Water levels are taken from the 19 wells shown in Figure 5-8, and samples are taken from 12 of these wells (Table 5-1). Water levels from the PAW program wells are taken quarterly and water samples are obtained semi-annually.



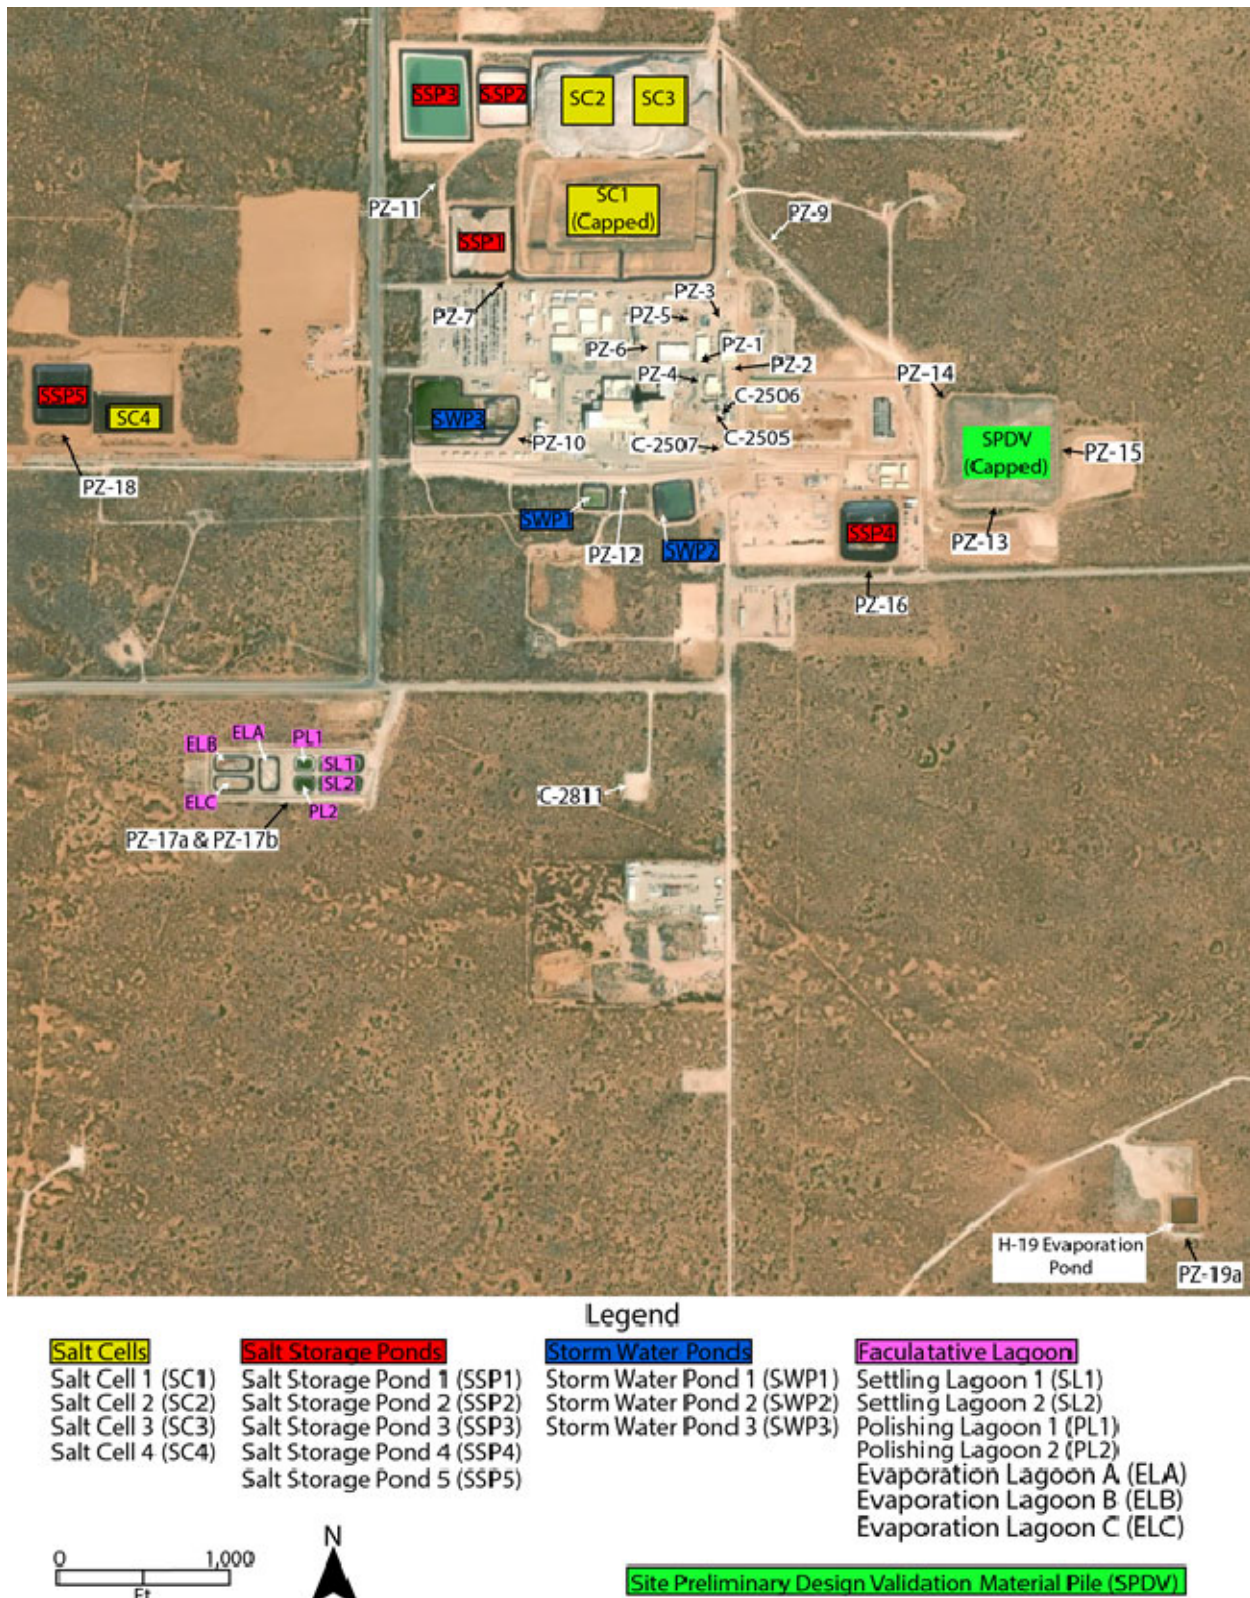

**Figure 5-7 - Location of Perched Anthropogenic Water (PAW) Wells (Piezometers PZ-1 through 15, C-2811, C-2505, C-2506, C-2507, WQSP-6a)**



General chemistry of the PAW is monitored for parameters specified in the DP-831 permit, using standard analytical methods. Analysis is performed for the parameters in table 5-2. Additionally, field indicator parameters measured are temperature, pH, and specific conductance. Serial and final samples are collected from PAW wells in accordance with WP 02-EC1003, Low-Flow Groundwater Purging and Sampling.

### **5.3.5 Surface Water Monitoring**

Infiltration controls have been constructed in accordance with DP-831 to minimize the infiltration of storm water runoff. These include Storm Water Pond 1, 2 and 3, Salt Storage Ponds 1, 2, and 3 and berms and ditches associated with these retention ponds. As specified in DP-831 and WP 02-EM1001, water samples are collected after a significant storm event or annually (whichever is more frequent) from the Salt Storage Ponds 1, 2, and 3, Storm Water Ponds 1, 2, and 3. Samples are analyzed as shown in table 5-2, which also reflects the latest DP-831 permit conditions. A significant storm event is defined in DP-831 condition 11 as storm events of 2 inches or greater in a 24-hour period.

The WIPP Sewage Treatment Facility uses a Facultative Lagoon system to biologically treat industrial and domestic waste water. The system consists of seven synthetically lined impoundments, which includes two settling lagoons (Settling Lagoons 1 and 2), two polishing lagoons (Polishing Lagoons 1 and 2), and three effluent lagoons (A, B, and C). The sewage treatment facility is operated in accordance with a discharge permit (DP-831) issued by the New Mexico Environment Department. DP-831, which was last updated in July of 2014, outlines operating, monitoring, reporting, and contingency measures for unplanned discharges, as well as closure requirements.

As specified in DP-831 and/or described in WP 02-EM1001, Sewage Lagoon and Infiltration Controls Sampling, water samples are taken from the settling lagoons and each of the two final effluent lagoons (B and C, provided there is water) are collected periodically as indicated in table 5-1. Samples from these locations are analyzed as indicated in table 5-2. Figure 5-3 inset and Figure 5-7 indicate the location of the Facultative Lagoon impoundments.

Evaporation Pond H-19 is a single, synthetically lined evaporation pond permitted for evaporative disposal of nonhazardous wastewater collected from sources such as purged groundwater during Detection Monitoring Program (DMP) well sampling and other sources not potentially radiologically contaminated, at the WIPP Site. Brine collected from the underground interception wells is also discharged into H-19, provided it is not radiologically contaminated or exceeds Resource Conservation and Recovery Act (RCRA) thresholds. Fluids determined to be detectably contaminated are shipped off-site to a facility authorized to accept such materials for disposition. The operation, maintenance, monitoring, and closure of the evaporation pond are described in the discharge permit. Evaporation Pond H-19 (location shown in Figure 5-8) is sampled periodically as indicated in table 5-1. Samples from this location are analyzed as indicated in table 5-2.

## **5.4 Land Management**

Parties who desire to conduct activities that affect lands under the jurisdiction of the DOE outside the PPA are required to prepare a land use request (LUR). A LUR consists of a narrative description of the project, a completed Environmental Concerns Review form, and a map depicting the location of the proposed activity. The LUR is used to determine if applicable regulatory requirements have been met before the approval of a proposed project. An LUR is submitted to the Land Use Coordinator by any organization desiring to complete any construction, rights-of-way, pipeline easements, or similar actions within the WIPP Site boundary and on lands used in the operation of WIPP, under the management of the DOE (DOE/WIPP-93-004). The LUR is then reviewed by the Carlsbad Field Office (CBFO) National Environmental Policy Act (NEPA) Compliance Officer for approval. Additional details on LUR requirements can be found in the Waste Isolation Pilot Plant Land Management Plan, DOE/WIPP-93-004.

## **5.5 Oil and Gas Surveillance**

Surveillance of oil and gas activities within one mile of the WIPP boundary is conducted in accordance with the U.S. Department of the Interior Bureau of Land Management/DOE MOU (DOE, 2012b). Oil and gas activities within the defined land sectors are monitored periodically to identify new activities associated with oil and gas exploration/production, including:

- Survey staking
- Geophysical exploration
- Pipeline construction
- Drilling
- Wellhead workovers
- Changes in well status
- Anomalous occurrences (e.g., leaks, spills, accidents, noxious weeds, etc.)

Data from this activity and the Delaware Basin Drilling Surveillance Program, are used to estimate the probability of human intrusion by drilling for the WIPP performance assessment in support of compliance recertification applications every five years. In addition, observations of drilling activities adjacent to the WIPP Site boundary are used to determine that no driller intrudes into the Land Withdrawal Area as described in Waste Isolation Pilot Plant Land Management Plan, DOE/WIPP-93-004.

Activities that implement the Land Management MOU elements are described in WP 02-EM1024, EM&H Field Work and Implementation of the Land Use Request.

## **6.0 DATA ANALYSIS**

As needed, statistical methods may be used to analyze data collected in some of the environmental monitoring subprograms. This section describes general statistical methods that can be used for analyzing the data. The goal of statistical data analysis is to provide an objective and reliable means for comparing measurements to the

objectives of the data collection program, typically to determine whether the data indicate compliance with limits. Only those statistical tests that properly represent the data within the tested set and are necessary to demonstrate the desired information are used.

The data from sample media may be graphed by analyte to evaluate analytical consistency presented in a time trend plot. Should a discrepancy be noted during this review, an in-depth evaluation can be performed to identify the source of the deviation (e.g., statistical outlier or analytical technique/error). This is particularly useful with the DMP results.

Data analysis is required for each parameter before a statistically valid interpretation can be achieved. Five general levels of data analysis are described here. Data analysis at each of these levels is considered for each parameter. The levels are:

- (1) Determination of accuracy for each point measurement by quantification and control of precision and bias
- (2) Evaluation of the effects of correlation on the expected value of the point measurement due to location and time of sampling
- (3) Identification of the appropriate model of variability (i.e., a probability density distribution) for each point measurement and the calculation of descriptive statistics based on the chosen model
- (4) Treatment of data anomalies
- (5) Interpretation of data through statistically valid comparisons (tests) and trend analysis

Each of these levels of data analysis is described below. Program requirements for data analysis are covered in more detail in subprogram plans and procedures.

## **6.1 Accuracy**

Accuracy is the closeness of a measurement to its actual, or true, value. Since the true value cannot be determined independently, accuracy cannot be absolutely determined. However, accuracy is controlled by two basic elements: bias (consistent over or underestimation of the true value) and precision (concentration of repeated measurements around a central [expected] value). Accuracy is maximized when bias is minimized and precision is maximized.

To some extent, precision and bias are controlled by strict adherence to sample collection, handling, and measurement protocols. Environmental monitoring plans and procedures specify the protocols for those functions performed at WIPP.

The remaining element of precision and bias is quantitatively estimated through periodic performance of the following measurements:

- Measurement of field duplicate/replicate samples
- Repeated measurement of the same sample (laboratory duplicate)
- Measurement of blank samples
- Measurement of standard spiked samples (samples of an equivalent medium containing a known amount of the target analyte)

The measurement of duplicate samples is used for assessing precision incurred through the entire process of sample collection, handling, and measurement. Repeated measurements are used to determine the amount of imprecision attributable to measurement. Blanks are analyzed to monitor purity of reagents and any other cross-contamination attributing bias to the sample results during collection of samples and laboratory analysis. Contract laboratories performing WIPP sample analyses may be required to participate in performance evaluation programs and pass the specific criteria set forth for measuring precision and accuracy.

The methods for satisfying these requirements will depend upon the sampling and measurement characteristics of each parameter. Generally, these specifications will be followed:

- One field duplicate sample is collected for each ten samples collected
- One repeated measurement is made for each discrete set of samples analyzed, or for each tenth sample analyzed, whichever is more frequent
- One blank sample is analyzed for each discrete set of samples analyzed (for radioactivity counts, the background count is not considered a blank)
- Spiked samples are measured

Variations from these specifications may be required due to peculiarities of the individual parameters and are stated in the analysis for that parameter.

## **6.2 Temporal and Spatial Analysis**

Environmental variables are classified as random variables, or more precisely stochastic processes, and are functions of space and time. The effect of one or both of these two factors on the expected value of a point measurement is statistically evaluated through spatial analysis and time series analysis. However, these methods often require extensive sampling efforts that are in excess of the practical requirements of the WIPP program. The application of these methods to a particular variable must, therefore, be limited by consideration of its significance in the final interpretation of the data. For specific statistical analyses, the DOE Handbook (DOE-HDBK-1216-2015) provides detailed guidance.

In particular, spatial analysis has limited use in this program, although the effect of spatial correlation on the interpretation of the data is considered for each parameter. Spatial variability is accounted for by the use of predetermined key sampling locations.

Data analysis is performed on a location-specific basis, or data from different locations are combined only when the data are considered to be statistically homogeneous.

Trend analysis plays a more important role in data analysis for the EMP. Variables may be reported as time series, either in tabular form or plots. For key time series variables, these plots are in the form of control charts on which control limits will be identified based on the preoperational database, fixed standards, control location databases, or other standards for comparison.

### **6.3 Distributions and Descriptive Statistics**

Descriptive statistics may be calculated for homogeneous data sets. These would include a central value and a standard deviation. The central value is the mean of the data. The standard deviation is calculated and used as a basis for the reported range in variation. Typically,  $\pm 2$  standard deviations (approximately a 95 percent confidence level) from the mean are plotted on the graphs.

### **6.4 Data Anomalies**

Historical data and/or trend charts are maintained on parameters and constituents for which analysis is performed in the DMP. The historical databases with established control limits at the 95 percent confidence level (or  $\pm 2$  standard deviations from the mean) are used in identifying an outlier. The 95 percent confidence level means that 5 percent, or 1 out of 20, normal results are expected to fall outside the limits. For analytical measurements reported as non-detect or below the method detection limit, the practical quantitation limit (which is between 3 and 10 times the method detection limit) is set as the upper threshold. An investigation is prompted by reviewing the sampling process and verifying that the data quality objectives were met. The data are qualified accordingly and documented when the analytical results indicate matrix contamination, method problems encountered during analysis, or an inconsistent sampling is identified. All analytical results are included in the charts, but excluded in establishing control limits if a known error has been identified. Including outliers in calculating control limits generates a range of values too broad or too small.

### **6.5 Data Comparisons**

Comparisons between data sets may be performed using standard statistical tests. The selection of the specific test is dependent upon the relative power of the test and the degree to which the underlying requirements of the test are met. In addition to tests comparing data from distinct locations and times, trend analyses may be performed on time series where sufficient data exist. A 95 percent confidence level will be used for the final interpretation of DMP results. A 99 percent confidence level may be used for the radiological monitoring program.

## **6.6 Laboratory Procedures**

Environmental sampling plans and procedures used to obtain quality results for WIPP are contained and/or described in the following documents:

- WP 02-1, WIPP Groundwater Monitoring Program Plan
- The environmental monitoring or compliance procedures of the WP 02-EM/WP 02-EC series
- The VOC monitoring plans and procedures of the WP 12-VC series
- WP 12-RL.01, Radiochemistry Quality Assurance Plan
- WP 13-1, Nuclear Waste Partnership LLC Quality Assurance Program Description

WIPP has analytical capabilities, both on-site at the WIPP facility (radiological screening) and in a nearby population center (full capability), as well as subcontracted analytical support. Each laboratory is responsible for maintaining an approved QA program for each of the programs discussed in section 5.0.

## **6.7 Sample Handling**

### **6.7.1 Sample Identification and Tracking**

There is a sample number used to uniquely identify environmental samples collected. Many of the environmental monitoring subprograms use a sample number containing sample-specific information used to accurately identify sample type, sample location, date, and sequence of sampling event, as described in Administrative Processes for Environmental Monitoring and Hydrology Programs (WP 02-EM3001). The VOC monitoring programs (WP 12-VC.01, Volatile Organic Compound Monitoring Plan), and the GMP (WP 02-1) use different systems of sample identification. A detailed description of the sample identification for radiological and nonradiological samples, including sample identification, calculations, computer inputs, and other applicable reviews, are described in environmental sampling procedures. Field data sheets are also maintained in accordance with procedures. The sample tracking is performed from collection to delivery at the laboratory.

### **6.7.2 Sampling Schedule**

The sample type, location, and frequency of collection are noted in table 5-1. The sampling schedule at WIPP is based on waste composition, climate, and demography.

### **6.7.3 Environmental Activity Levels**

During operations, TRU wastes will remain in sealed containers. After the February 2014 unplanned radiological release event, extensive environmental direct measurement and media sampling of air, soil, and vegetation were performed. With the exception of a single initial air sample, no results for TRU radionuclides were found to be statistically above expected background levels outside the EUA. Therefore, radionuclide levels in environmental samples are expected to remain at background during recovery and future operations. Environmental samples are collected in accordance with accepted practices and widely recognized methodologies and criteria for environmental monitoring (e.g., principles of DOE-HDBK-1216-2015 as reflected in the environmental monitoring procedures of the WP 02-EM series).

### **6.7.4 Packaging and Shipping of Samples**

Environmental samples sent off-site for analysis are packaged and shipped in accordance with transportation regulations and specific sampling procedures. These procedures outline the chain-of-custody requirements that ensure the integrity of samples. Chain-of-Custody (CofC) is a requirement every time samples are exchanged from person to person and can have multiple exchanges. Chain-of-Custody forms are filled out as samples are obtained and signatures are required by the sampler (initiator) and upon receipt at the laboratory. An example CofC can be found in procedure 02-EM1010. WIPP does not handle high-activity samples in the environmental monitoring programs. Contract laboratories are required to follow QA/QC procedures to ensure that cross-contamination between high and low activity samples will not occur.

The laboratory must be approved through an evaluation to be put on the Nuclear Waste Partnership (NWP) qualified supplier list. Before proceeding with exercising a contract to analyze samples, the contract laboratory must pass strict QA laboratory evaluations. The quality of the data from contract analytical laboratories is verified by (1) participation in inter-laboratory cross-checks, when feasible, (2) duplicate and blank sample analysis, and (3) occasional comparison of results from sample duplicates or splits.

## **7.0 QUALITY ASSURANCE**

This section defines the policies and procedures that have been implemented at WIPP to provide confidence in the quality of environmental data. QA practices that cover monitoring activities at WIPP are consistent with applicable elements of the 18-element format in American National Standards Institute/American Society of Mechanical Engineers (ANSI/ASME) NQA-1, Quality Assurance Program Requirements for Nuclear Facilities (ANSI, 1989). All QA practices flow down into the monitoring program through the CBFO QAPD and are adopted in the NWP QAPD 13-1.

WP 13-1 defines QA requirements and responsibilities that apply to NWP. The format of the QAPD is based on the QA criteria of 10 CFR §830.122, Quality Assurance Criteria. The NWP QAPD also addresses certain EPA QA requirements extracted from the EPA's QA/G-5, Guidance for Quality Assurance Project Plans (EPA/240/R-02/009). The NWP QAPD contains requirements that apply to environmental data operations (i.e., compliance activities associated with collection and analysis of environmental samples, including data reduction, handling, reporting, and records management).

A comprehensive QA program has been implemented to ensure that the data collected are representative of actual concentrations in the environment. Each contract laboratory is responsible for maintaining an approved QA program detailing the following:

- Routine calibration of instruments
- Frequent source and background checks (as applicable)
- Routine yield determinations of radiochemical procedures (as applicable)
- Replicate/duplicate analyses to check precision
- Standard and spike analyses to check accuracy
- Tracking expiration dates of reagents to ensure that chemical purity, which could affect the results of the analytical process, is not compromised
- Data review by primary and secondary personnel for data entry accuracy.
- Validation and verification of data.
- All reporting documents are reviewed by at least three personnel in the department for accuracy.

The accuracy of chemical or radiochemistry analysis is ensured through the use of standards traceable to the National Institute of Standards and Technology and participation in a performance evaluation program, as feasible.

## **7.1 Goal**

The NWP QA policy sets a goal to perform all work in such a manner that the required quality is attained or exceeded. To attain this goal, NWP has developed and implemented a formal QA program that is tailored for activities associated with receipt of TRU waste, including operational safety, environmental compliance, and performance assessment.



## **7.2 Program Elements**

The specific WIPP QA program elements that are applicable to the EMP are provided in the 10 CFR §830.122 criteria. These elements establish the applicable QA requirements that are required for compliance activities associated with the collection and analysis of environmental samples, including data analysis, handling, reporting, and records management.

### **7.2.1 Program**

The WIPP environmental monitoring and laboratory program documents and statements of work address specific environmental data operations as required by the QAPD. Environmental data operations project descriptions incorporate the following elements, as appropriate:

- Data accuracy (i.e., the degree to which data agree with an accepted reference or true value)
- Data precision (i.e., a measure of agreement between comparable data gathered or developed under similar conditions expressed in terms of a standard deviation)
- Data representativeness (i.e., the degree to which data accurately and precisely represent a characteristic of a population, a parameter, variations at a sample point, or environmental conditions)
- Data completeness (i.e., a measure of the amount of valid data obtained compared to the amount that was expected)
- Data comparability (i.e., a measure of the confidence with which one data set can be compared to another)
- Data reproducibility (i.e., a measure of the variability among measurements of the same sample by different laboratories)
- Data validation (i.e., a systematic process for reviewing a body of data against a set of criteria to provide assurance that the data are adequate for their intended use)
- Data verification (i.e., a systematic process for reviewing a body of data to verify completeness)

### **7.2.2 Personnel Training and Qualification**

The WIPP training program has been designed to ensure that personnel performing work are capable of performing their assigned task proficiently. Personnel who perform

work that requires special skills or abilities are required to meet the qualification requirements for that specific task unless directly supervised by a qualified person.

### **7.2.3 Quality Improvement**

The quality improvement process has been established and implemented to improve quality and provide corrective action procedures. Corrective action and nonconformance procedures for activities associated with environmental data collection are identified in environmental monitoring and laboratory program documents and statements of work. The following elements are addressed:

- Predetermined limits for data acceptability beyond which corrective action is required
- Process for tracking, verification, and closeout
- Identification of individuals responsible for initiating corrective action and individuals responsible for verifying and approving implementation of the corrective action

Corrective action may be initiated through routine operations, performance audits, system audits, inter-/intra-laboratory comparison studies, or performance demonstrations conducted by the DOE's Carlsbad Field Office.

### **7.2.4 Documents and Records**

Procedures are established that control the preparation, review, approval, issuance, use, and revision of documents that establish policies, prescribe work, specify requirements, establish design, or that are being used for the performance of quality-related activities. Procedures are also in place to ensure that records are specified, prepared, reviewed, approved, and maintained to accurately reflect completed work. This process is described in WP 15-RM, WIPP Records Management Program. The WIPP records management program provides a project-wide records management system that coordinates the collection, maintenance, identification, and preservation of WIPP records.

Records generated through environmental monitoring activities, including the ASER and key supporting documents, are controlled and maintained in accordance with WP 15-RM. This document also provides the interpretations and the guidance necessary to meet the records management requirements for the creation, maintenance, use, and disposition of records that document and support the WIPP mission.

Complete, accurate, and auditable environmental monitoring program records will be maintained. The NWP RIDS will govern environmental monitoring records management.

### 7.2.5 Work Processes

Work is performed to established technical standards and administrative controls. The design of sampling methodology, use of equipment, and required processes are documented and approved. The following requirements for sample design are addressed in environmental monitoring program documents:

- Description of techniques or guidelines used to select sampling sites
- Specific sampling procedures to be used
- Charts, flow diagrams, or tables delineating sampling program operations
- A description of containers, procedures, reagents, etc., used for sample collection, preservation, transportation, and storage
- Special conditions for the preparation of sampling equipment and containers to avoid sample contamination
- Sample preservation methods and holding times
- Time considerations for shipment of samples to the laboratory
- Sample custody or chain-of-custody procedures
- Forms, notebooks, databases, and procedures to be used to document sample history, sampling conditions, and required analyses

The sample size for environmental samples must be large enough to meet minimum detectable activity requirements and minimize counting uncertainties without excessively long count times (radiological analyses). If possible, sufficient sample should be available for re-analyses or confirmation of results as well as to analyze one duplicate sample per batch. The analytical laboratory may request additional sample volume or provide specific collection directions in addition to the routine field procedure protocols for specific media.

Samples collected for environmental compliance activities or for Site validation are controlled by approved chain-of-custody procedures. The actual practices used are documented. The following sample custody procedures are specified in the environmental monitoring program documents.

- For field sampling operations:
  - Requirements for preparation of reagents or supplies which become an integral part of the sample
  - Forms for recording the location and specific considerations associated with sample acquisition
  - Specific sample preservation methods
  - Sample labels containing all information necessary for effective sample tracking
- For laboratory operations:
  - Identification of responsible party to act as sample custodian at the laboratory facility authorized to sign for incoming field samples, to obtain documents of shipment, and to verify the data entered onto the same custody records
  - A laboratory sample custody log consisting of serially numbered standard lab-tracking report sheets
  - Specification of laboratory sample custody procedures for sample handling, storage, and disbursement for analysis

Custody records are treated as permanent QA records by the recipient upon final transmission of the analytical data.

Requirements for laboratory calibration are documented and include:

- A written description of the calibration process used for major measurement parameters
- Frequency of calibration
- Calibration standards to be used, as well as their sources and traceability

Environmental monitoring and laboratory program documents contain required preventive maintenance of equipment used for collection and measurement of environmental data and identify processes for controlling the analyses of samples collected for environmental data operations activities. Calibration of required equipment, used by WIPP personnel for this EMP, is coordinated through the WIPP Metrology Department for a third-party calibration company to perform.

### **7.2.6 Design**

The design of sampling methodologies is documented and approved. Requirements for sample design are addressed in environmental program documents and DOE guidance documents and Orders, including the design considerations listed in section 7.2.5. In addition, requirements for verification and validation of calculations and sample results by independent personnel are included in the quality assurance plan that controls the environmental program operations.

### **7.2.7 Procurement**

The control of procurement documents ensures that procured items and services meet established requirements and specifications. Basic procurement requirements include:

- Applicable design specifications and other order requirements are referenced in documents for procurement of items and services
- Supplier has a QA program consistent with applicable requirements
- Procurement actions be performed in accordance with written procedures that describe the actions involved in the preparation, review, approval, control, and changes of procurement documents

### **7.2.8 Inspection and Acceptance Testing**

Inspection and acceptance testing of specified items and processes are conducted using established acceptance and performance criteria.

Equipment used for inspections and tests are calibrated and maintained in accordance with procedures and statements of work. These documents describe the calibration process, calibration frequency, and calibration standards to be used, as well as their sources and traceability.

All subcontractor equipment is inspected by safety professionals upon arrival to perform the work and periodically throughout the work evolution (i.e. drilling rigs).

### **7.2.9 Management Assessment**

Senior management assembles input from the following sources to form the basis of management assessment:

- Line management's self-assessment reports
- Independent assessment reports

- Corrective action reports, including conditions adverse to quality, nonconformance reports, program deficiency reports, audit reports, and requests for corrective action

Following the assessment, the effectiveness of the QA program is documented. Further, areas for quality improvement (for significant nonconformances or high-risk items/activities), preventive or corrective actions, milestones for completion, responsibility assignments, trend analysis, and lessons learned are documented.

#### **7.2.10 Independent Assessment**

Independent assessments are performed to verify procedure compliance and are also used to prove independent oversight of the self-assessment process performed by line management. Independent assessments focus on improving items and processes by emphasizing line organization's achievement of quality. Results from independent assessments are transmitted to senior management as input for determining the effectiveness of the integrated QA program. In this regard, personnel performing independent assessments act in a management advisory function.

Waste Isolation Pilot Plant Environmental Monitoring Plan  
DOE/WIPP-99-2194, Rev. 12

---

<b>REFERENCES</b>	
DOCUMENT NUMBER AND TITLE	
10 CFR §Part 61. Licensing Requirements for Land Disposal of Radioactive Waste.	
10 CFR §830.122. Quality Assurance Criteria.	
10 CFR §Part 835, Occupational Radiation Protection.	
40 CFR §Part 58. Appendix E to Part 58-Probe and Monitoring Path Siting Criteria for Ambient Air Quality Monitoring.	
40 CFR §Part 61, Subpart H. National Emissions Standards for Emissions of Radionuclides Other Than Radon From Department of Energy Facilities.	
40 CFR §Part 191. Environmental Radiation Protection Standards for Management and Disposal of Spent Nuclear Fuel, High-Level and Transuranic Radioactive Wastes.	
40 CFR §Part 194. Criteria for the Certification and Recertification of the Waste Isolation Pilot Plant's Compliance with the 40 CFR Part 191 Disposal Regulations.	
40 CFR §261.3. Definition of Hazardous Waste.	
40 CFR §Part 264. Standards for Owners and Operators of Hazardous Waste Treatment, Storage, and Disposal Facilities.	
20.4.1 New Mexico Administrative Code. Title 20, Hazardous Waste Management. New Mexico Administrative Code, Santa Fe, New Mexico.	
ANSI, 1989. Quality Assurance Program Requirements for Nuclear Facilities. ANSI/ASME NQA-1, 1989 Edition. American Society of Mechanical Engineers, New York, New York.	
ASTM, 2006. Standard Practice for Analysis of Reformed Gas by Gas Chromatography. ASTM D1946-90 (reapproved 2006). West Conshohocken, PA, ASTM International.	
Corley, J. P., D. H. Denham, R. E. Jaquish, D. E. Michels, A. R. Olsen, and D. A. Waite, 1981. A Guide for Environmental Radiological Surveillance at DOE Installations. DOE/EP-0023. Washington, D.C., U.S. Department of Energy.	
Daniel B. Stephens and Associates, Inc., 2003. Water Budget Analysis of Shallow Subsurface Water at the Waste Isolation Pilot Plant, 2003.	
DOE/EIS-0026. Final Environmental Impact Statement, Waste Isolation Pilot Plant, Vols. 1 and 2.	
DOE Order 5400.1, Change 1. General Environmental Protection Program (cancelled DOE Order).	
DOE/WIPP-88-025. Operational Environmental Plan for the Waste Isolation Pilot Plant. DOE/WIPP-88-025.	
DOE/EH-0170T. Environmental Regulatory Guide for Radiological Effluent Monitoring and Environmental Surveillance.	

<b>REFERENCES</b>	
DOCUMENT NUMBER AND TITLE	
DOE/WIPP-92-037.	Statistical Summary of the Radiological Baseline for the WIPP.
DOE/WIPP-92-038.	Summary of the Salt Impact Studies at the WIPP, 1984 to 1990.
DOE/WIPP-92-039.	A Study of Disturbed Land Reclamation Techniques for the WIPP.
DOE/WIPP-92-013.	Background Water Quality Characterization Report for the WIPP.
DOE Order 5400.5, Change 2.	Radiation Protection of the Public and the Environment (superseded by DOE Order 458.1).
DOE, 1995.	Memorandum of Understanding between the Environmental Protection Agency and the Department of Energy concerning the Clean Air Act Emission Standards for Radionuclides 40 CFR, Part 61, including Subpart H, I, Q, & T. May 16, 1995.
DOE, 1997.	Environmental Measurement Laboratory Procedures Manual. HASL-300, 28th Edition. New York, New York, U.S. Department of Energy.
DOE/WIPP-98-2285.	Waste Isolation Pilot Plant RCRA Background Groundwater Quality Baseline Report.
DOE Order 436.1.	Departmental Sustainability.
DOE Order 231.1B.	Environment, Safety and Health Reporting.
DOE, 2012b.	Waste Isolation Pilot Plant Statement of Work for the Bureau of Land Management. Washington, D.C., U.S. Department of Energy.
DOE Order 458.1.	Radiation Protection of the Public and the Environment.
DOE-HDBK-1216-2015.	DOE Handbook: Environmental Radiological Effluent Monitoring and Environmental Surveillance.
DOE/WIPP-93-004.	Waste Isolation Pilot Plant Land Management Plan.
DOE/WIPP-07-3372.	Waste Isolation Pilot Plant Documented Safety Analysis.
DOE/WIPP-20-3591.	Waste Isolation Pilot Plant Annual Site Environmental Report for 2019.
DOE O 232.2A.	Occurrence Reporting and Processing of Operations Information.
EPA, 1994.	Contract Laboratory Program Volatile Organics Analysis of Ambient Air in Canisters (Draft). Washington, D.C., U.S. Environmental Protection Agency.
EPA, 1996.	Test Methods for Evaluating Solid Waste, Physical/Chemical Methods, Method 8260B, Volatile Organic Compounds by Gas Chromatography/Mass Spectrometry (GC/MS). Washington, D.C., U.S. Environmental Protection Agency.



<b>REFERENCES</b>	
DOCUMENT NUMBER AND TITLE	
EPA 402-R-97-001.	Guidance for the Implementation of EPA's Standards for Management and Storage of Transuranic Waste (40 CFR Part 191, Subpart A) at the Waste Isolation Pilot Plant.
EPA 625/R-96/010b.	TO-15, Determination of Volatile Organic Compounds (VOCs) in Ambient Air Collected in Specially Prepared Canisters and Analyzed by Gas Chromatography/Mass Spectrometry (GC/MS).
EPA-454/R-99-005.	Meteorological Monitoring Guidance for Regulatory Modeling Applications.
EPA/240/R-02/009.	EPA QA/G-5, Guidance for Quality Assurance Project Plans.
ISO, 2015.	ISO 14001. Environmental Management Systems – Requirements with Guidance for Use. 2015. International Organization for Standardization, Geneva, Switzerland.
IT Corporation, 2000.	Waste Isolation Pilot Plant RCRA Background Groundwater Quality Baseline Update Report. November 2000. Albuquerque, New Mexico.
Mercer, J. W., 1983.	Geohydrology of the Proposed Waste Isolation Pilot Plant Site, Los Medaños Area, Southeastern New Mexico. U.S. Geological Survey, Water-Resources Investigations Report 83-4016.
New Mexico Environment Department.	Hazardous Waste Facility Permit, No. NM4890139088-TSDF. Santa Fe, New Mexico.
New Mexico Environment Department.	Discharge Permit DP-831, Waste Isolation Pilot Plant. 2014. Santa Fe, New Mexico.
Powers, D. W., S. J. Lambert, S. E. Shaffer, L. R. Hill, W. D. Weart (editors), 1978.	Geological Characterization Report, Waste Isolation Pilot Plant (WIPP) Site, Southeastern New Mexico. Sandia National Laboratories Report SAND 78-1596, Vols. 1 and 2. Albuquerque, New Mexico, Sandia National Laboratories.
P. L. 102-579, as amended by P. L. 104-201.	1992. Waste Isolation Pilot Plant Land Withdrawal Act.
WP 02-EC1003,	Low Flow Groundwater Purging and Sampling
WP 02-EM1009,	Soil Sampling
WP 02-EM1010,	Field Parameter Measurements and Final Sample Collection
WP 02-EM1024,	EM&H Field Work and Implementation of the Land Use Request
WP 02-EM3001,	Administrative Processes for Environmental Monitoring and Hydrology Programs
WP 02-EM3004,	Radiological Verification and Validation
WP 12-5,	Waste Isolation Pilot Plant Radiation Safety Manual
WP 12-VC.01,	Volatile Organic Compound Monitoring Plan

<b>REFERENCES</b>	
DOCUMENT NUMBER AND TITLE	
WP 02-1,	WIPP Groundwater Monitoring Program Plan
WP 02-EM.01,	WIPP Meteorological Program
WP 02-EM1001,	Sewage Lagoon and Infiltration Controls Sampling
WP 02-EM1011,	Biotic Sampling
WP 02-EM1012,	Airborne Particulate Sampling
WP 02-EM1014,	Groundwater Level Measurement
WP 02-EM1017,	Surface Water and Sediment Sampling
WP 02-EM1019,	Vegetation Sampling
WP 12-ER4924,	Radiological Field Monitoring
WP 12-RL.01,	Radiochemistry Quality Assurance Plan
WP 13-1,	Nuclear Waste Partnership LLC Quality Assurance Program Description
WP 15-RM,	WIPP Records Management Program